

Hiab XS 244


Range 20–24 tm




Hiab XS 244 Basic data

Technical data	EP-5 HiDuo	E-6 HiDuo	EP-4 HiPro	E-6 HiPro	E-8 HiPro
Max. lifting capacity (kNm)	211	203	223	210	200
Outreach, hydraulic extensions (m)	15.1	16.2	12.7	16.2	21.0
Outreach, manual extensions (m)	17.3	20.6	17.3	20.6	22.6
Outreach, with jib (m)	-	-	-	24.7	-
Outreach / lifting capacity (m / kg)	2.5 / 8400	2.4 / 8400	2.5 / 8800	2.5 / 8400	2.4 / 8400
	4.5 / 4800	4.5 / 4600	4.4 / 5200	4.5 / 4750	4.7 / 4350
	6.2 / 3300	6.1 / 3150	6.1 / 3600	6.1 / 3300	6.3 / 2960
	8.2 / 2380	7.9 / 2280	8.1 / 2620	7.9 / 2360	8.1 / 2060
	10.4 / 1800	9.8 / 1720	10.3 / 2020	9.8 / 1800	10.0 / 1500
	12.7 / 1440	11.8 / 1340	12.6 / 1640	11.8 / 1400	12.0 / 1120
	15.0 / 1200	13.9 / 1100	-	13.9 / 1160	14.1 / 880
	-	16.1 / 920	-	16.1 / 980	16.3 / 700
	-	-	-	-	18.6 / 580
	-	-	-	-	20.9 / 520
Outreach / lifting capacity, with jib (m / kg)	-	-	-	19.2 / 330	-
	-	-	-	20.8 / 290	-
	-	-	-	22.7 / 250	-
	-	-	-	24.6 / 230	-
Slewing angle (°)	190 - 410	190 - 410	190 - 410	190 - 410	190 - 410
Height in folded position (mm)	2335	2335	2335	2335	2335
Width in folded position (mm)	2500	2500	2495	2500	2500
Installation space needed (mm)	1192	1256	1242	1256	1156
Weight, "standard" crane without stabilizers (kg)	2940	3150	2860	3210	3540
Weight, stabilizer equipment (kg)	381 - 474	381 - 474	381 - 474	381 - 474	381 - 474
Weight, jib (kg)	-	-	-	450	-

Hiab XS 244 E-8 HiPro

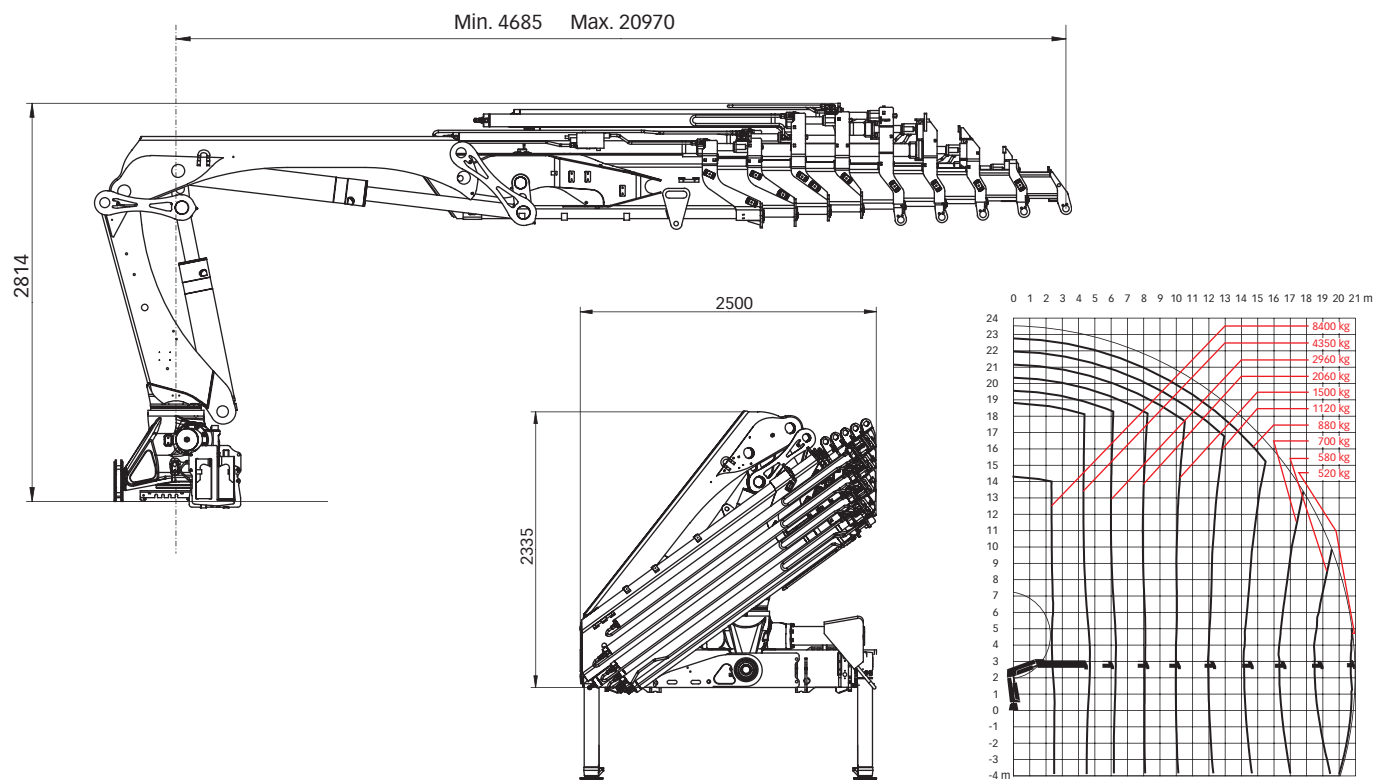

Hiab XS 244 E-6 HiPro jib 45X-3

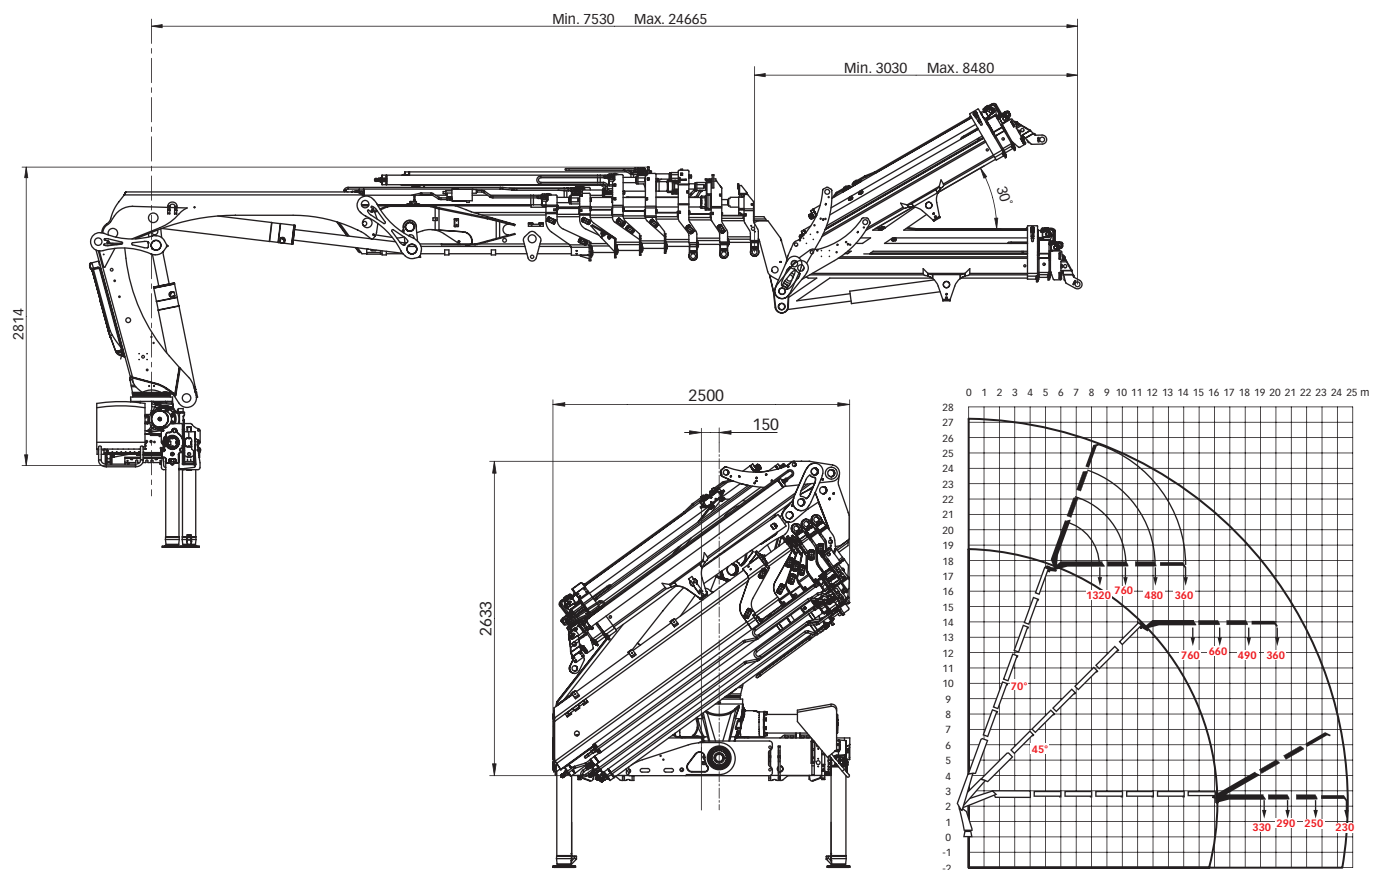

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands, Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. www.cargotec.com