

Hiab XS 288


Range 24–28 tm




Hiab XS 288 Basic data

Technical data	EP-5 HiDuo	E-6 HiDuo	EP-4 HiPro	E-6 HiPro	E-8 HiPro
Max. lifting capacity (kNm)	246	237	259	245	236
Outreach, hydraulic extensions (m)	15.1	16.2	12.7	16.2	21.0
Outreach, manual extensions (m)	17.3	20.6	17.3	20.6	22.6
Outreach, with jib (m)	-	-	-	26.2	-
Outreach / lifting capacity (m / kg)	2.6 / 9400	2.5 / 9400	2.6 / 9800	2.6 / 9400	2.5 / 9200
	4.5 / 5600	4.5 / 5300	4.4 / 6000	4.5 / 5500	4.7 / 5100
	6.2 / 3900	6.1 / 3750	6.1 / 4200	6.1 / 3900	6.3 / 3550
	8.2 / 2840	7.9 / 2740	8.1 / 3100	7.9 / 2840	8.1 / 2540
	10.4 / 2160	9.8 / 2080	10.3 / 2380	9.8 / 2180	10.0 / 1880
	12.7 / 1740	11.8 / 1660	12.6 / 1940	11.8 / 1740	12.0 / 1460
	15.0 / 1460	13.9 / 1360	-	13.9 / 1420	14.1 / 1160
	-	16.1 / 1160	-	16.1 / 1220	16.3 / 940
	-	-	-	-	18.6 / 800
	-	-	-	-	20.9 / 700
Outreach / lifting capacity, with jib (m / kg)	-	-	-	19.2 / 330	-
	-	-	-	20.7 / 280	-
	-	-	-	22.3 / 240	-
	-	-	-	24.2 / 200	-
	-	-	-	26.1 / 180	-
Slewing angle (°)	190 - 420	190 - 420	190 - 420	190 - 420	190 - 420
Height in folded position (mm)	2335	2335	2335	2335	2335
Width in folded position (mm)	2500	2500	2495	2500	2500
Installation space needed (mm)	1192	1256	1242	1256	1156
Weight, "standard" crane without stabilizers (kg)	3150	3420	3070	3480	3750
Weight, stabilizer equipment (kg)	381 - 487	381 - 487	381 - 487	381 - 487	381 - 487
Weight, jib (kg)	-	-	-	665	-

Hiab XS 288 E-8 HiPro

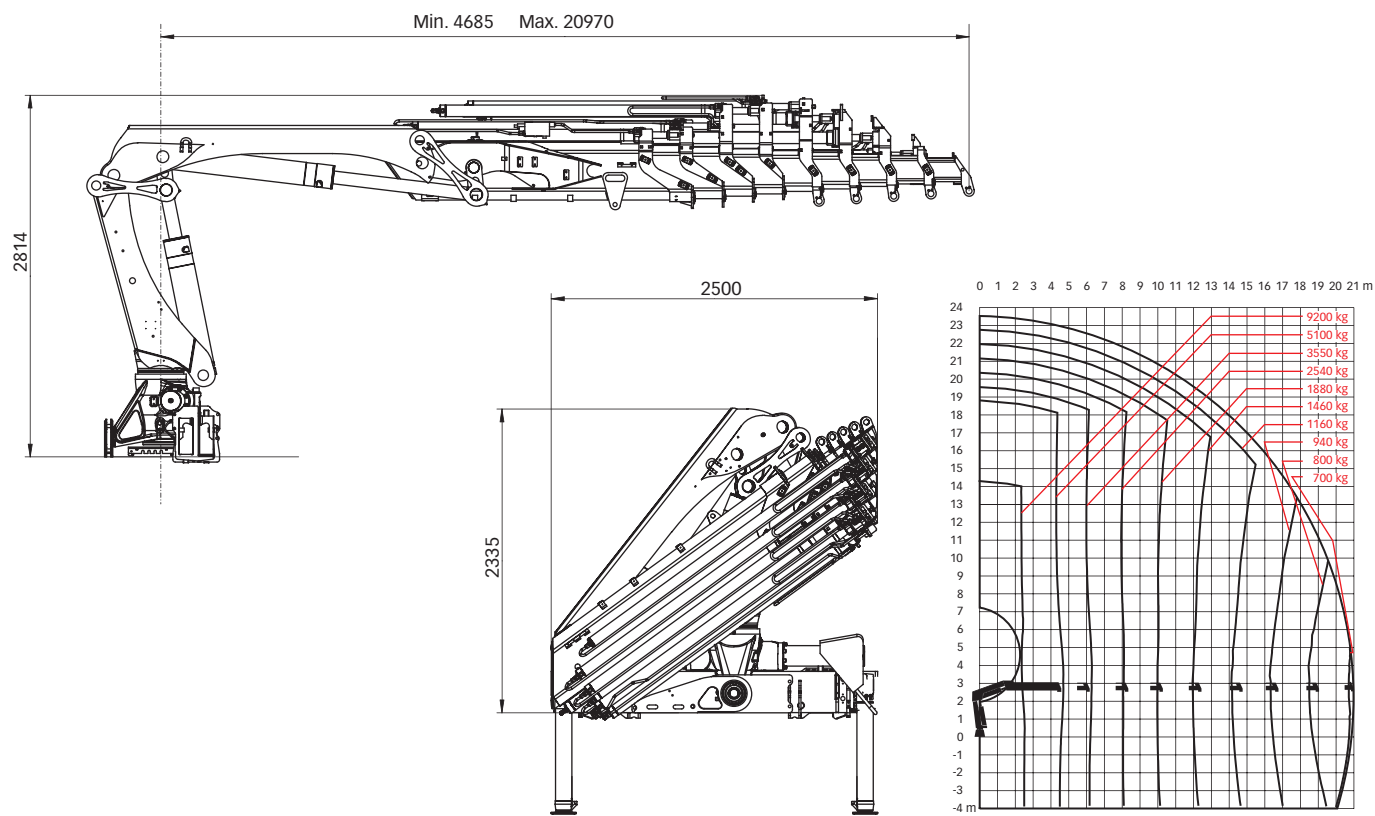

Hiab XS 288 E-6 HiPro jib 70X-4

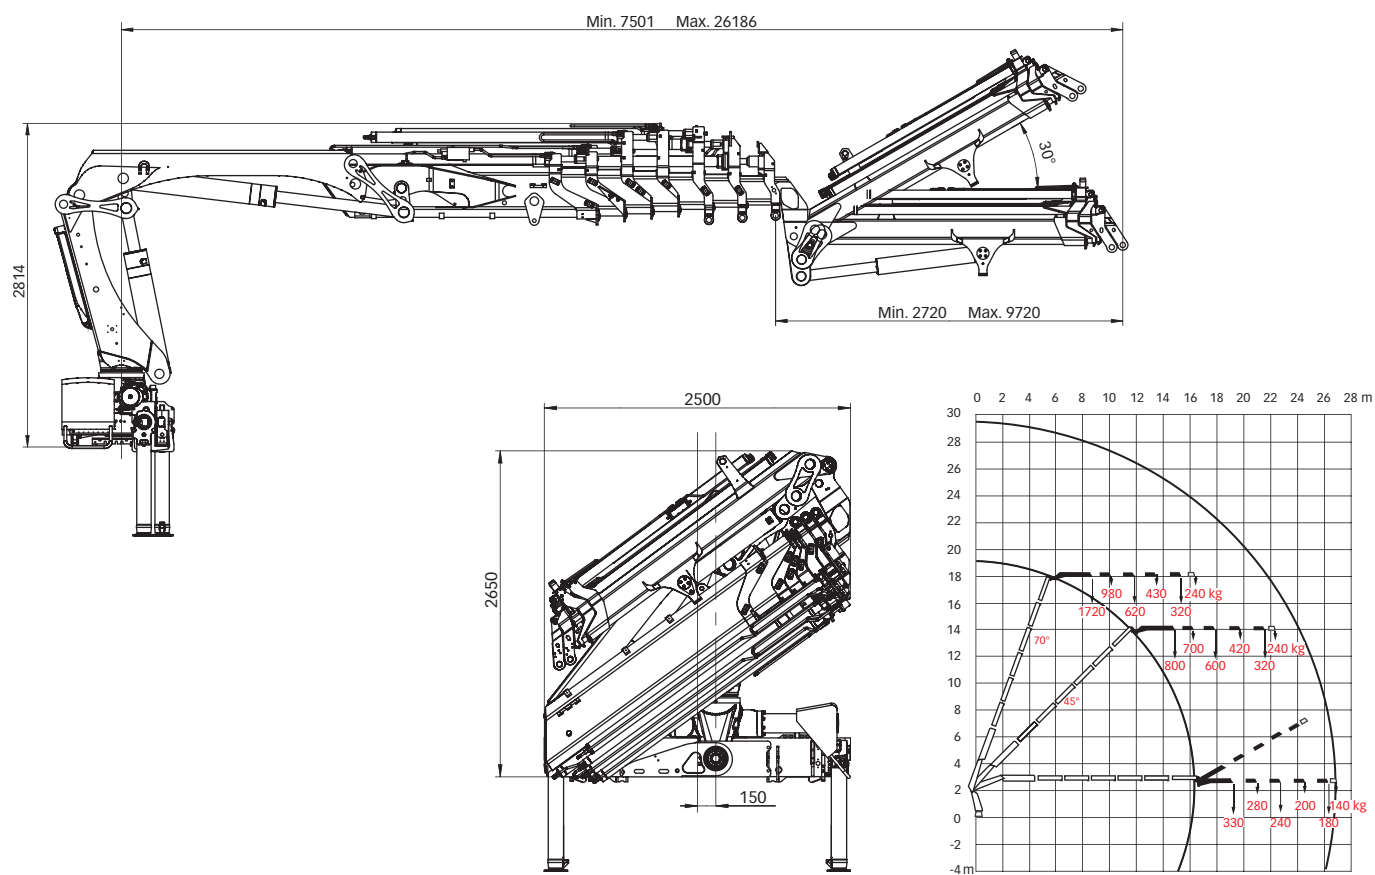

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands, Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. www.cargotec.com