

JONSERED 2640Z




JONSERED 2640Z BASIC DATA

Technical data	J2640Z 82	J2640Z 95	J2640Z 82 Booster	J2640Z 95 Booster
Max. lifting capacity (kNm)	225	216	254	245
Hydraulic outreach* (m)	8,18	9,46	8,18	9,46
Hydraulic boom extension* (m)	1,70	2,90	1,70	2,90
Outreach / lifting capacity, standard (m/kg)	3.0 / 6600 4.0 / 5200 5.0 / 4400 6.0 / 3750 7.0 / 3200 7.7 / 2900	3.0 / 5600 4.0 / 5000 5.0 / 4200 6.0 / 3600 7.0 / 3050 8.0 / 2650 9.0 / 2100	3.0 / 7350 4.0 / 5850 5.0 / 4950 6.0 / 4250 7.0 / 3600 7.7 / 3250	3.0 / 6000 4.0 / 5650 5.0 / 4750 6.0 / 4100 7.0 / 3450 8.0 / 3000 9.0 / 2380
Slewing system	Double	Double	Double	Double
Slewing angle (°)	370	370	370	370
Slewing torque, gross (kNm)	36.4	36.4	36.4	36.4
Max. slope viable at full capacity (°)	8	8	8	8
Max. working pressure (MPa) ¹⁾	27	27	30	30
Recommended oil flow – fixed pump (l/min), 1-pump	80	80	80	80
Recommended oil flow – fixed pump (l/min), 2-pump	2 × 80	2 × 80	2 × 80	2 × 80
Min. recommended oil flow – variable displacement pump (l/min)	-	-	-	-
Power needed at rec. oil flow (kW) - fixed pump, 1-pump	40	40	44	44
Power needed at rec. oil flow (kW) - fixed pump, 2-pump	80	80	89	89
Power needed at rec. oil flow (kW) - variable displacement pump	-	-	-	-
Road width (mm)	2482	2482	2482	2482
Weight - Top seat crane with ET450 stabilizer equipment (kg) ²⁾	2780	2970	2785	2975
Weight - Top seat crane with SY550 stabilizer equipment (kg) ²⁾	2910	3100	2915	3105


¹⁾ Pressure booster option for momentary usage available, detailed information supplied by request

²⁾ Weight with fixed pump system, oil weight included


Load diagram J2640Z 82

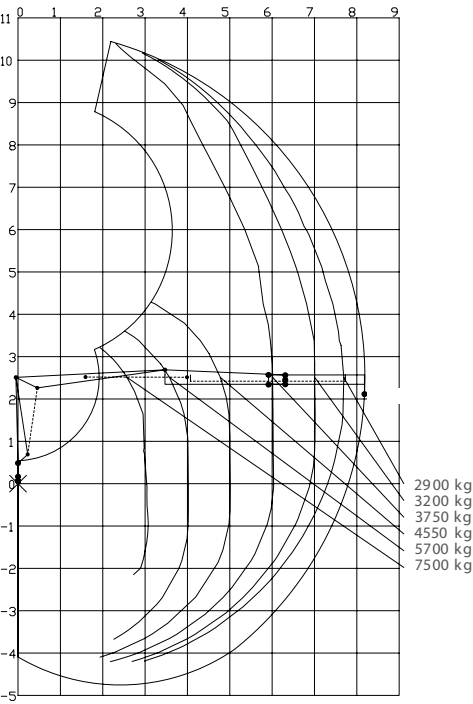


Load diagram J2640Z 95

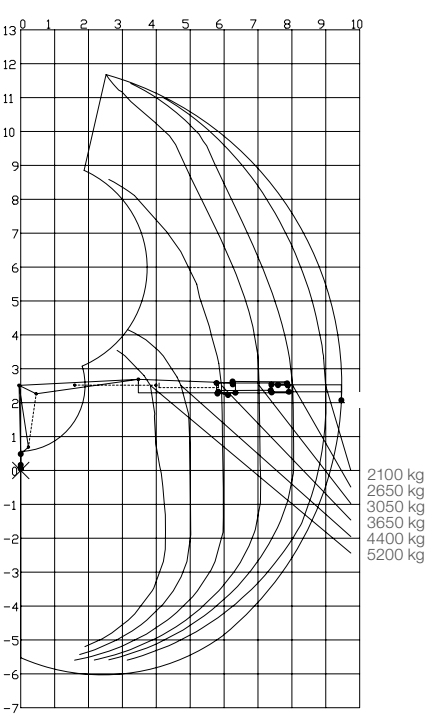


Load diagram J2640Z 82
Booster

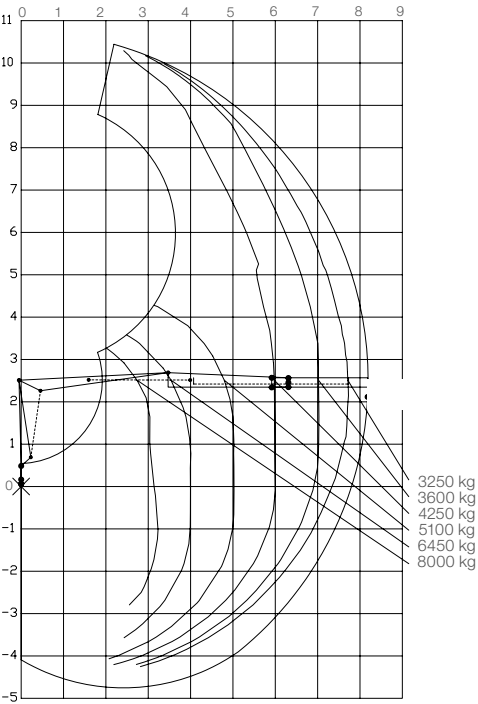


Load diagram J2640Z 95
Booster

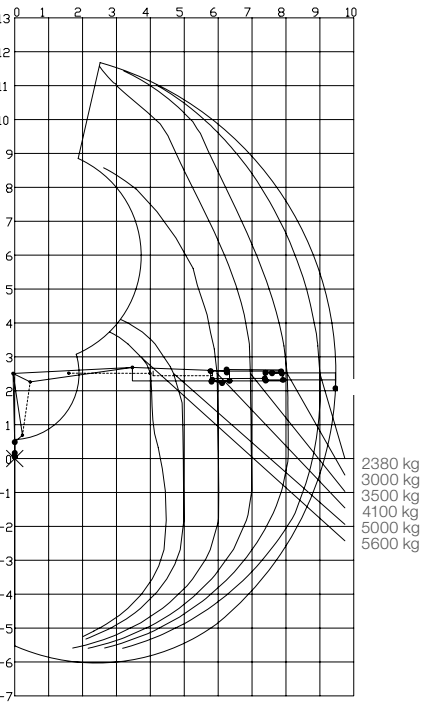

Side view J2640Z

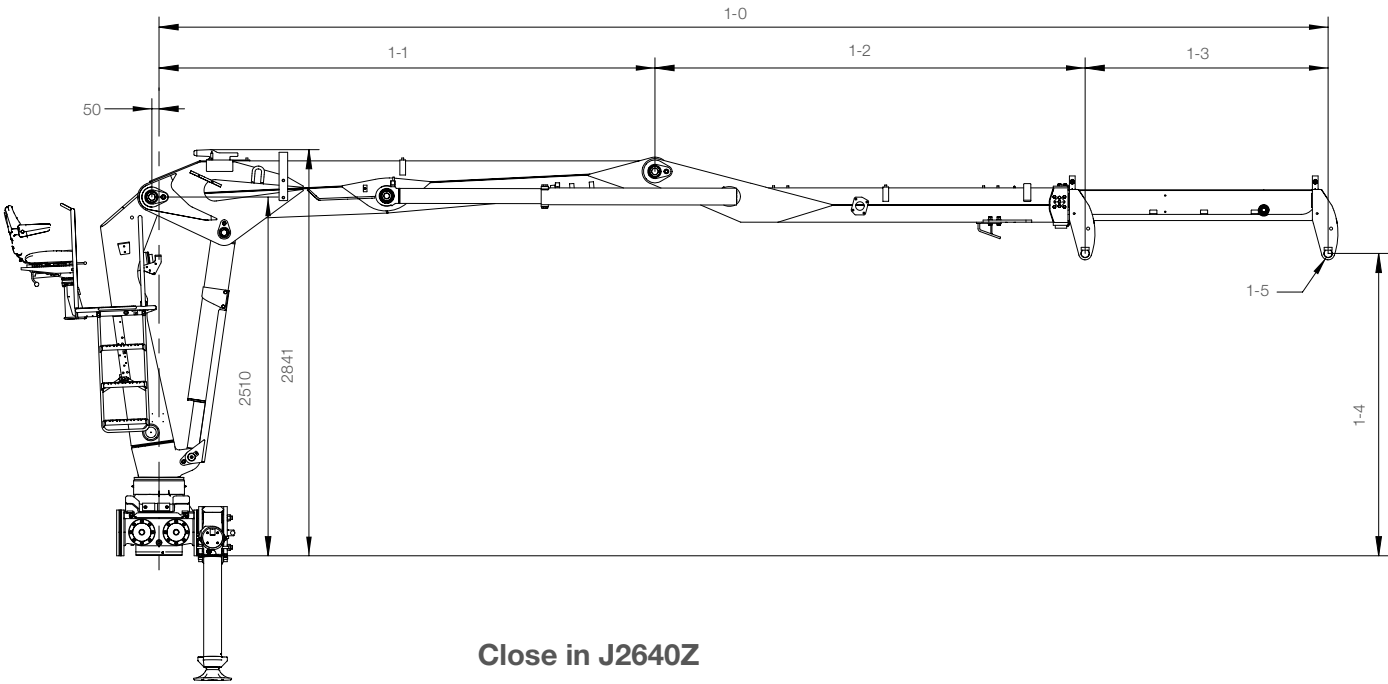


Close in J2640Z

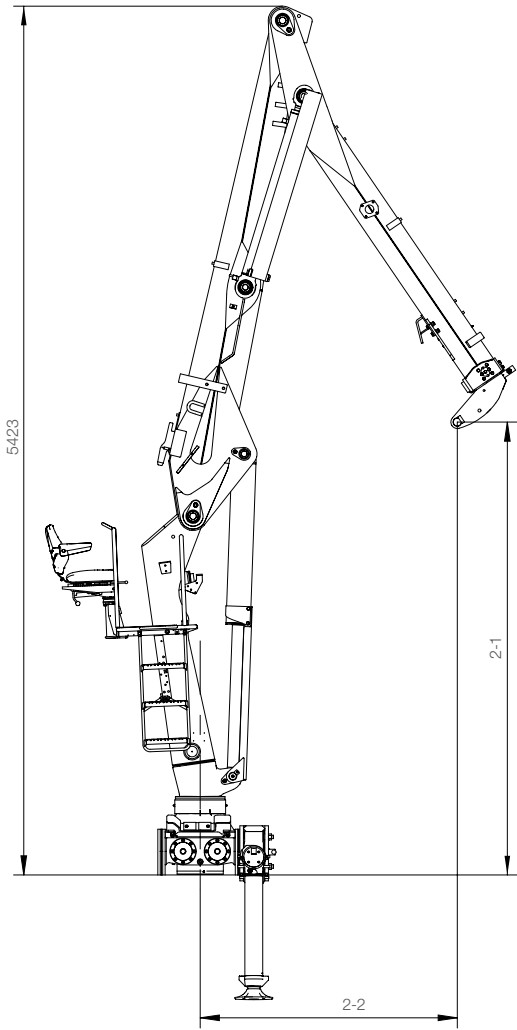


Model	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5	2-1	2-2	HPL
82	6480	8180	3470	3010	1700	2116	Ø 40, B=184	3169	1799	X
95	6560	9460	3470	3090	2900	2074	Ø 40, B=184	3079	1809	X

Folded J2640Z 82

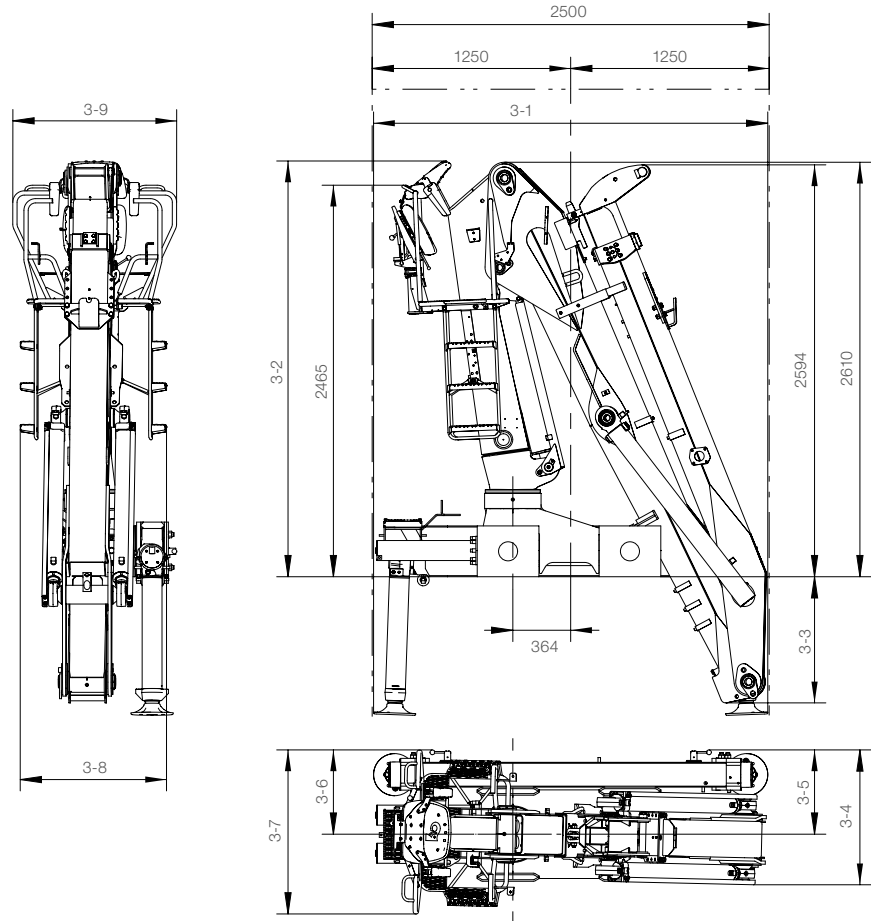


Folded J2640Z 95

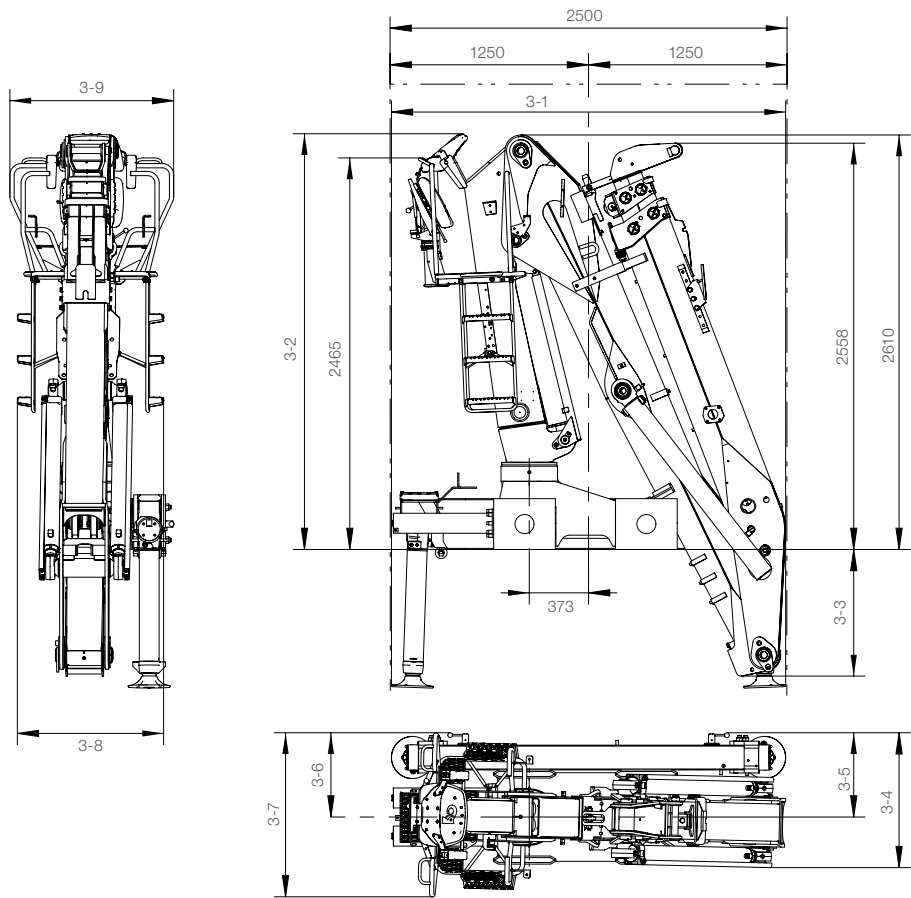


Model	3-1	3-2	3-3	3-4	3-5	3-6	3-7	3-8	3-9
82	2482	2567	795	849	531	531	1033	921	1032
95	2482	2567	795	849	531	531	1033	915	1032


Stabilizers SY550

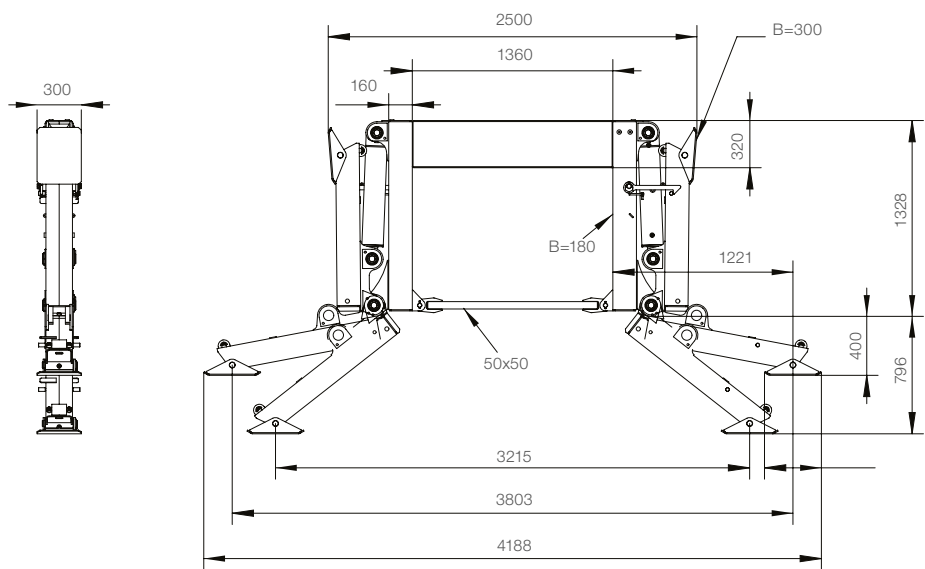


Stabilizers ET450

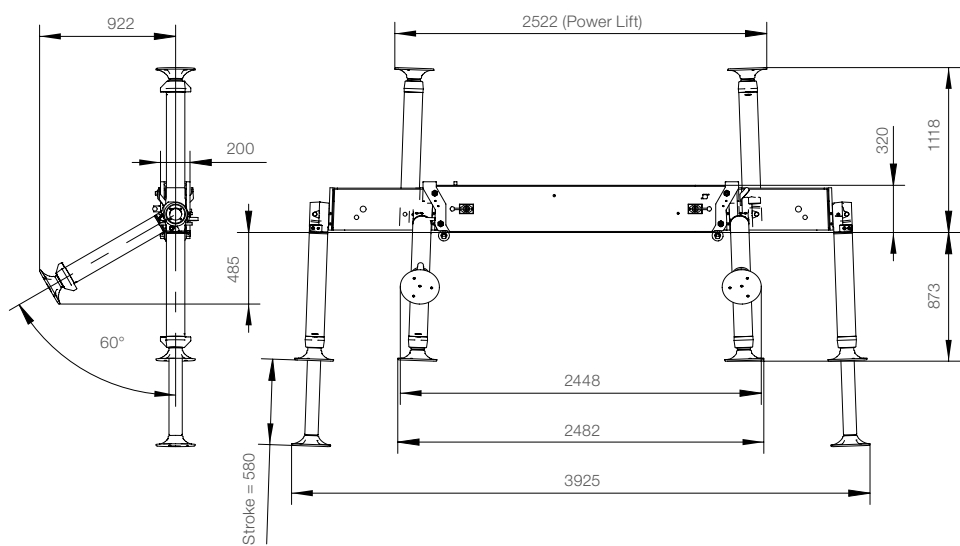


Base with stabilizers

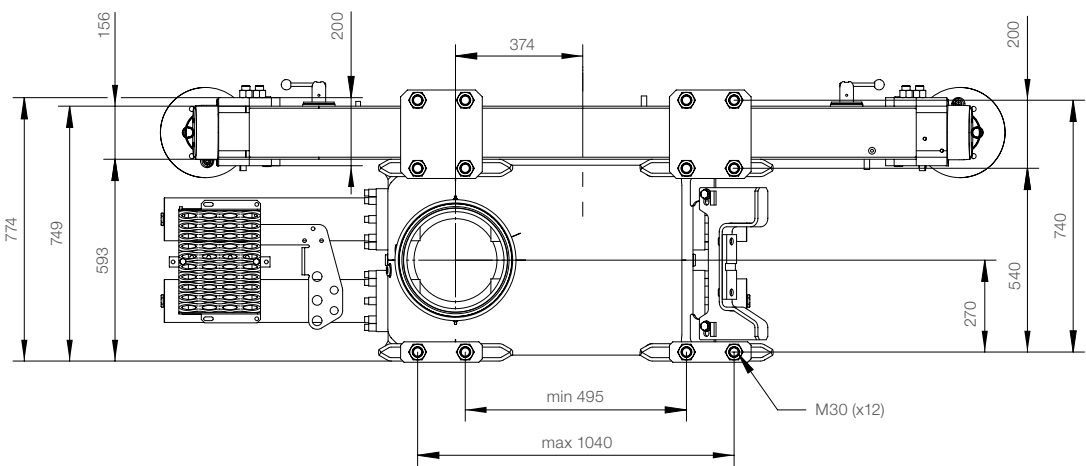


First boom

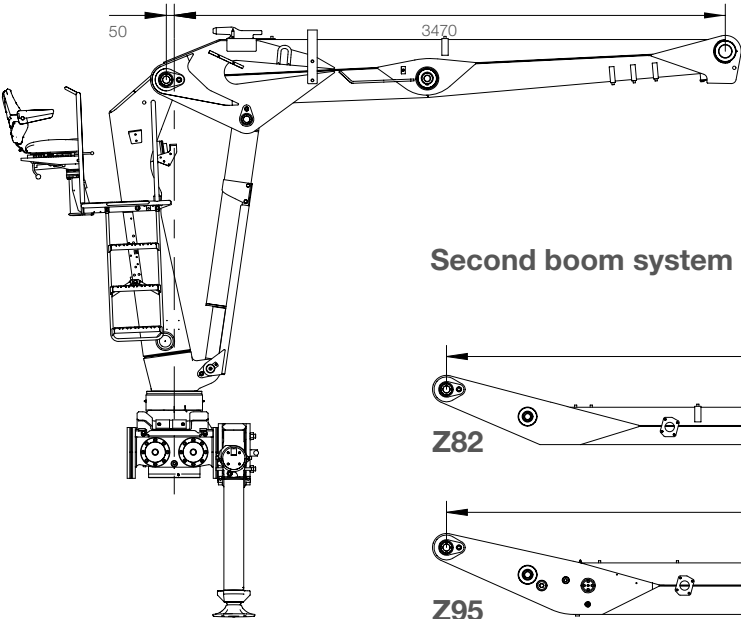

Second boom system

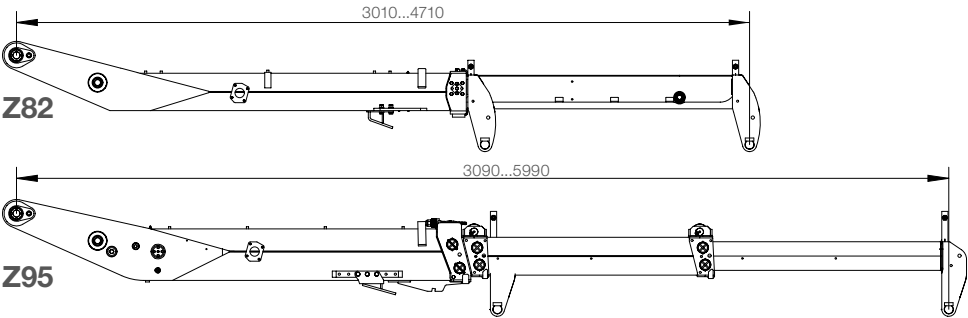

Top seat

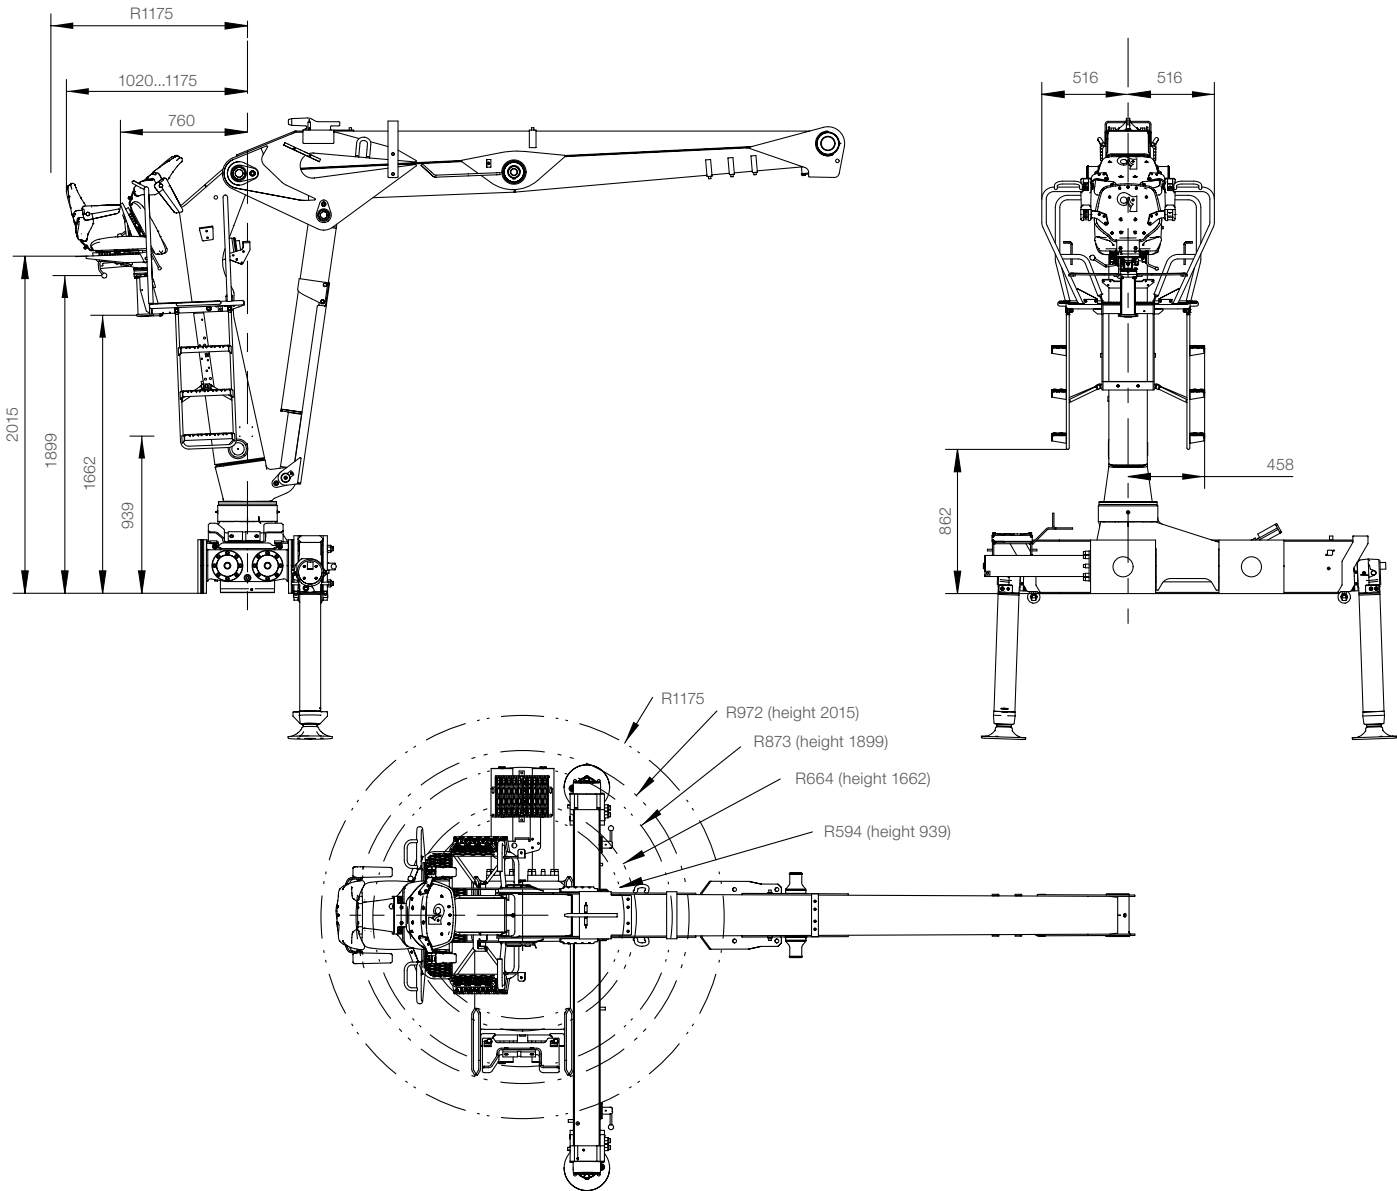

BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

© TD-J2640Z-EN-WW_161031

