

HOW FOREST PEOPLE DEFINE TOUGH DISCOVER THE LOGLIFT 140Z / 150Z



STRENGTHENING YOUR PERFO


Our forestry cranes have always delivered exceptional performance and rugged durability with low lifetime costs. The innovations in the new LOGLIFT 140Z and LOGLIFT 150Z reinforce our commitment to always provide you with the best. Discover what make the LOGLIFT 140Z and LOGLIFT 150Z perfect for you.

Hydraulic Pilot Control

Hydraulic Pilot Control (HPC) is an optional control system that gives you smooth and easy operation. Regardless of your choice of control device; conventional or joystick type – we promise a feather-touch response.

- Precision control over your crane movements
- Smooth, flawless operation
- Reduced stress on crane structure
- Increased life expectancy of your equipment



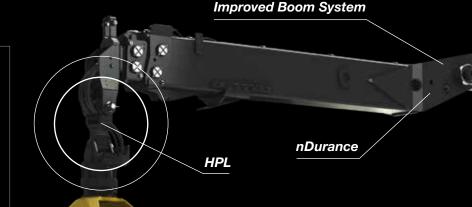

New top seat

for better comfort

Handling timber in the harsh environment of a forest is a challenging task. The new LOGLIFT 140Z and LOGLIFT 150Z have a newly designed seat that offers better driver comfort and durability.

- Elevated seat for better visibility and safety
- All-weather, anti-slip seat
- Adjustable armrest for better ergonomics
- New automatic stow function for easy parking, as an option
- Seatbelt included for increased safety



Smart Base

Three Point Bridge

Safety⁺ System


Most cranes have CE Systems that help enhance safety of the driver and those in the vicinity. The new LOGLIFT 140Z and LOGLIFT 150Z have a Safety+ System with a cycle and hour (SAC) counter that gives error codes and sensor state previews to help in troubleshooting and performing preventive maintenance

- External display shows data on crane performance during operation
- Rated capacity indicator
- Emergency stop button
- High boom and stabilizer extension warning



If you're looking for a rugged and reliable forestry crane that's quick and efficient and has a lower lifetime cost, the new LOGLIFT 140Z and LOGLIFT 150Z are perfect for you. After all, they're designed by forest people; for forest people.

RMANCE

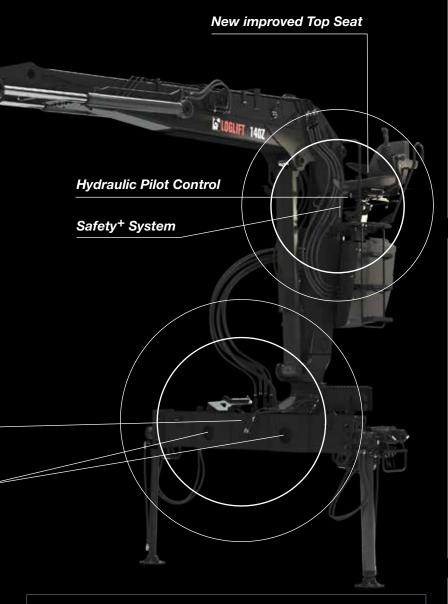

Three-year warranty

The new LOGLIFT 140Z and LOGLIFT 150Z are rugged and reliable machines and we're ready to stand behind this assertion with a three-year warranty. You can rest easy, secure in the knowledge that you've invested in a workhorse that will literally go on and on.



- Peace of mind with a three-year warranty
- Assurance that we're there to support you in the event your crane develops a problem

3 Year Warranty applies to the steel material costs (base, column, first boom, second boom, extension booms, three point bridge and stabilizer beams).

HPL[™] (Hose Protection Link)

to guard against blows and sticking

Protecting hoses on any crane is important, but especially in the harsh environment of log handling. Hose Protection Link (HPL) gives extra protection — from crane tip to rotator — against accidental impacts. The system includes the rotator and hanger to provide a complete and integrated solution.

- Robust link with a 40 mm upper pin
- Generous bearing dimensions for minimum wear
- Cleverly designed plug-in fittings
- Easy access for tightening, service and maintenance
- Quick-change hoses



Wide range of options

You want to have a crane that comes with options that are right for your application. The new LOGLIFT 140Z and LOGLIFT 150Z gives you just that. A wide range of hangers, rotators and grapples are available. Whether you're handling cut-to-length logs or full tree lengths, you can be sure you can get the job done – quickly and efficiently.

• Get more out of your equipment with well-adapted accessories

Wide service network

The new LOGLIFT 140Z/150Z is backed by the largest service and parts network in the industry. Where ever your business may be; wherever your work may take you, you can be sure we're there to support you.

- A Hiab-approved service centre or parts hub is never far away
- Scheduled service or repairs, you can be confident we'll have your crane back at work in no time at all

nDurance nano-technology paint process for all-weather protection

Rain, dust, sand and sunlight are unforgiving forces that wear on a crane all year around. This is why we have created nDurance — a technologically advanced and environmentally sound pre-treatment and paint process, based on nano-technology combined with state-of-the-art e-coating and powder painting.

- Nano-technology covers every square millimetre
- Three different protective layers for highest corrosion resistance
- 100 % phosphate free
- No heavy metals and virtually zero waste



Technical data

| Technical data | F140Z 80 | F140Z 95 | F150Z 80 | F150Z 95 |
|--|--|--|--|--|
| Max. lifting capacity (kNm) | 136 | 127 | 138 | 129 |
| Hydraulic outreach (m) | 8.00 | 9.49 | 8.00 | 9.49 |
| Hydraulic boom extension (m) | 1.65 | 2.94 | 1.65 | 2.94 |
| Outreach – lifting capacity, standard (m – kg) | 3.0 - 3750 4.0 - 3050 5.0 - 2600 6.0 - 2280 7.0 - 1940 7.5 - 1800 | 3.0 - 3450 4.0 - 2800 5.0 - 2400 6.0 - 2120 7.0 - 1820 8.0 - 1560 9.0 - 1240 | 3.0 - 4100 4.0 - 3200 5.0 - 2650 6.0 - 2300 7.0 - 1960 7.5 - 1820 | 3.0 - 3900 4.0 - 3000 5.0 - 2500 6.0 - 2160 7.0 - 1840 8.0 - 1580 9.0 - 1260 |
| Slewing system | Double | Double | Double | Double |
| Slewing angle (°) | 425 | 425 | 425 | 425 |
| Slewing torque, gross (kNm) | 28.6 | 28.6 | 28.6 | 28.6 |
| Max. slope viable at full capacity (°) | 8 | 8 | 8 | 8 |
| Max. working pressure (MPa) | 26 | 26 | 26 | 26 |
| Recommended oil flow – fixed pump (I/min), 1-pump | 70-90 | 70-90 | 70-90 | 70-90 |
| Recommended oil flow – fixed pump (I/min), 2-pump | 2 × 60-80 | 2 × 60-80 | 2 × 60-80 | 2 × 60-80 |
| Min. recommended oil flow – variable displacement pump (I/min) | - | - | - | - |
| Power needed at rec. oil flow (kW) - fixed pump, 1-pump | 34 | 34 | 34 | 34 |
| Power needed at rec. oil flow (kW) - fixed pump, 2-pump | 68 | 68 | 68 | 68 |
| Power needed at rec. oil flow (kW) - variable displacement pump | - | - | - | - |
| Road width (mm) | 2500 | 2500 | 2500 | 2500 |
| Weight - Top seat crane with standard stabilizer equipment* (kg) | 2160 | 2330 | 2280 | 2450 |

^{*}Weight with fixed pump system, oil weight included

140Z 80

140Z 95

150Z 80

150Z 95

Ø 40, B=184


Ø 40, B=184

Ø 40, B=184

Ø 40, B=184


This table shows a few examples of models, and represents some of all options available. With the opportunity to configure your crane, we can provide you with a crane perfectly tailored to your needs. Please contact your local dealer for more information on the variety of options we can offer.

Side view with top seat

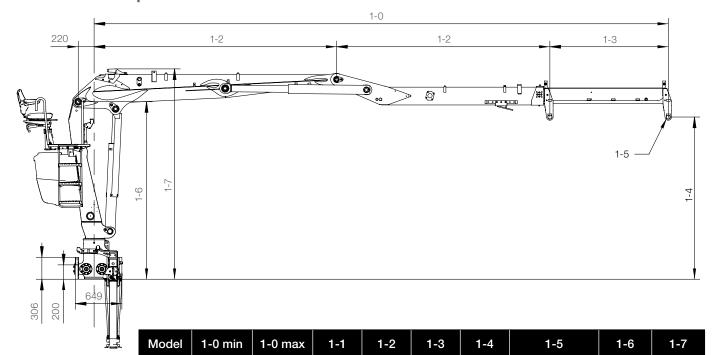


All measurements in mm


Load diagram 140Z95




Load diagram 140Z80



Load diagram 150Z80




Load diagram 150Z95

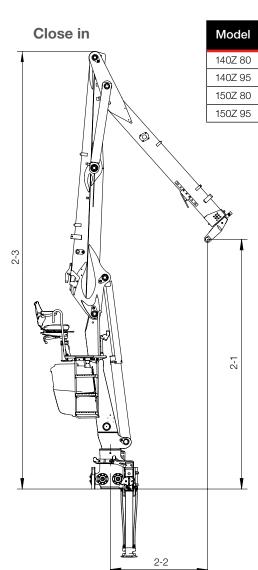


| Model | 2-1 | 2-2 | 2-3 |
|---------|------|------|------|
| 140Z 80 | 3522 | 1371 | 3173 |
| 140Z 95 | 3332 | 1459 | 3173 |
| 150Z 80 | 3557 | 1372 | 6207 |
| 150Z 95 | 3367 | 1460 | 6207 |


All measurements in mm



Top view with top seat

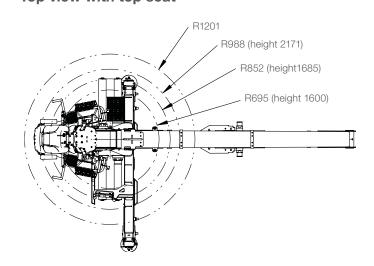

Folded view with top seat

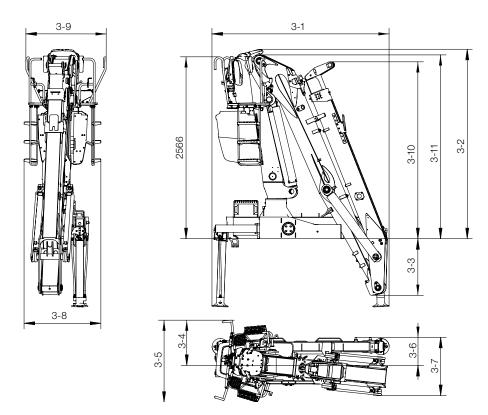


| Model | 3-1 | 3-2 | 3-3 | 3-4 | 3-5 | 3-6 | 3-7 | 3-8 | 3-9 | 3-10 | 3-11 |
|---------|------|------|-----|------|-----|-----|-----|------|------|------|------|
| 140Z 80 | 2498 | 2623 | 819 | 1158 | 638 | 397 | 826 | 1083 | 1133 | 2495 | 2593 |
| 140Z 95 | 2498 | 2623 | 819 | 1158 | 638 | 397 | 826 | 1083 | 1133 | 2517 | 2593 |
| 150Z 80 | 2498 | 2658 | 897 | 1158 | 638 | 397 | 823 | 1083 | 1133 | 2495 | 2593 |
| 150Z 95 | 2498 | 2658 | 897 | 1158 | 638 | 397 | 823 | 1083 | 1133 | 2517 | 2593 |


All measurements in mm

Chassis installations

Base B4500

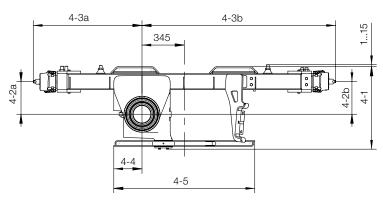

Base Standard




| Base | 4-1 | 4-2a | 4-2b | 4-3a | 4-3b | 4-4 | 4-5 |
|----------|-----|------|------|------|------|-----|------|
| Standard | 580 | 266 | 266 | 890 | 1580 | 230 | 1150 |
| B4500 | 580 | 266 | 266 | 890 | 1580 | 230 | 1150 |


| Fastening | 5-1 | 5-2 | 5-3 | 5-4 | 5-5 | 5-6 |
|-----------|------|-----|-----|------|-----|-----|
| Standard | 1090 | 520 | 550 | 1080 | 240 | 600 |
| B4500 | 1090 | 520 | 550 | 1080 | 240 | 600 |

All measurements in mm

All measurements in mm

Chassis installations

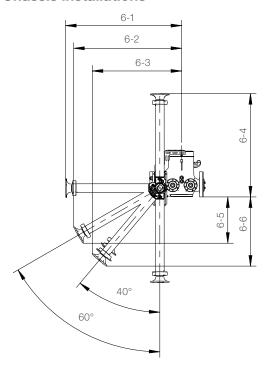

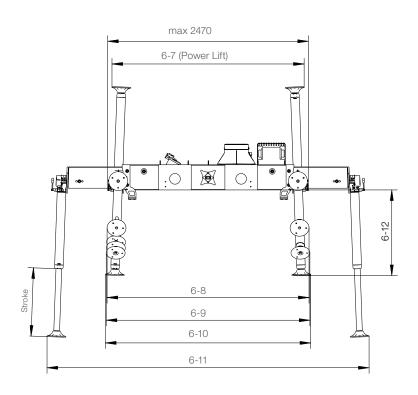


| Base | Stroke | 6-1 | 6-2 | 6-3 | 6-4 | 6-5 | 6-6 | 6-7 | 6-8 | 6-9 | 6-10 | 6-11 | 6-12 |
|----------|--------|------|------|------|------|-----|-----|------|------|------|------|------|------|
| Standard | 580 | 1245 | 1165 | 980 | 1090 | 480 | 715 | 2385 | 2455 | 2470 | 2485 | 3890 | 865 |
| | 670 | 1335 | 1245 | 1035 | 1180 | 525 | 785 | 2380 | 2455 | 2475 | 2490 | 3905 | 955 |
| | 750 | 1415 | 1315 | 1090 | 1260 | 565 | 845 | 2375 | 2460 | 2480 | 2495 | 3915 | 1040 |
| B4500 | 580 | 1245 | 1165 | 980 | 1090 | 475 | 710 | 2420 | 2470 | 2475 | 2485 | 4480 | 865 |
| | 670 | 1335 | 1245 | 1035 | 1180 | 520 | 780 | 2415 | 2470 | 2480 | 2490 | 4485 | 955 |
| | 750 | 1415 | 1315 | 1090 | 1260 | 560 | 840 | 2410 | 2470 | 2480 | 2490 | 4495 | 1035 |

All measurements in mm

Available boom combinations

First boom (top seat)

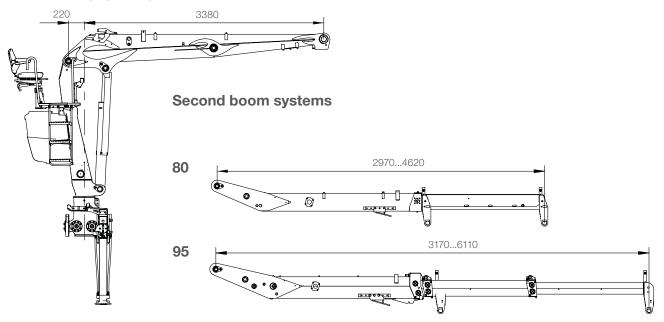

BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com



To learn more about LOGLIFT visit **loglift.com**

