

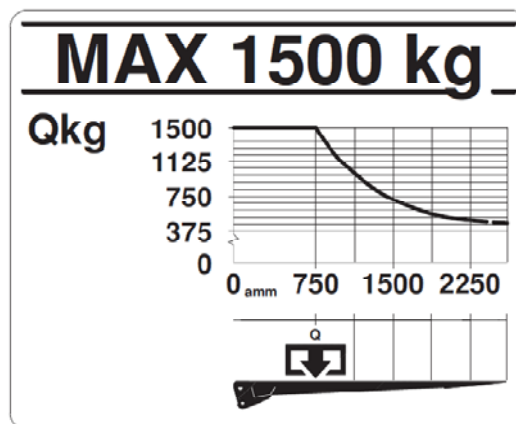
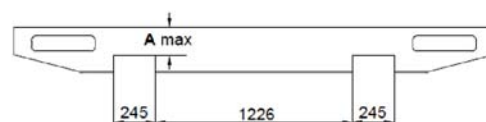
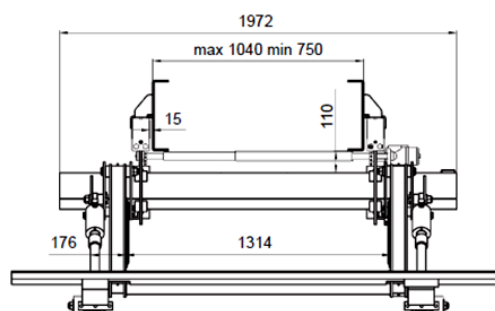


Loading Diagram

(160 bar)	24 volt
Pump - Motor Unit	135 A
Magnet (hydraulic unit)	2,6 A
Magnet (electric safety valve)	0,75 A
Solenoid	1,8 A
Cable area:	
Control cable	1,5 mm ²
Main cable 0-8 m	35 mm ²
Main cable 8-15 m	35 mm ²
Main cable >15 m	50 mm ²
Power source:	
Min. capacity	180 Ah
Min. voltage	18 Volt

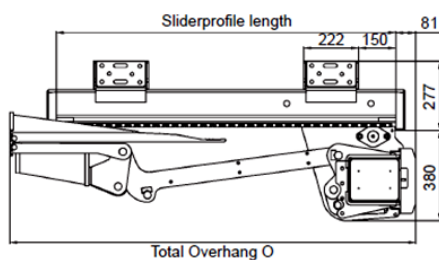

Installation dimensions (mm)

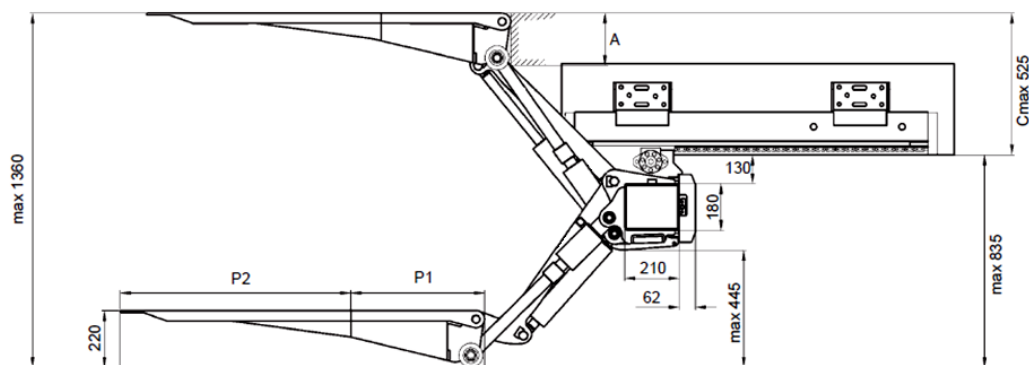

P1 (mm)	Slide profile length (mm)
- 600	1370
600 - 800	1590
800 -	1700

C	A
525	198
500	183
450	169
400	158
350	145
300	130
235	100

1500 / 2000 kg

P1	P2	O
524	989	1584
524	1164	1584
674	989	1734

ZEPRO

ZEPRO Sales

Tel: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: zepto@zepto.com, Internet: www.zepto.com