

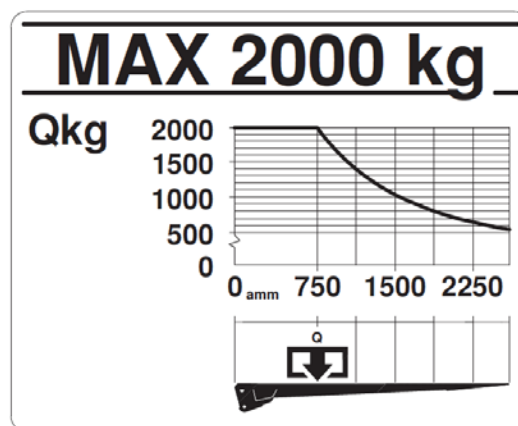


Loading Diagram

(200 bar)	24 volt
Pump - Motor Unit	160 A
Magnet (hydraulic unit)	2,6 A
Magnet (electric safety valve)	0,75 A
Solenoid	1,8 A
Cable area:	
Control cable	1,5 mm ²
Main cable 0-8 m	35 mm ²
Main cable 8-15 m	35 mm ²
Main cable >15 m	50 mm ²
Power source:	
Min. capacity	180 Ah
Min. voltage	18 Volt

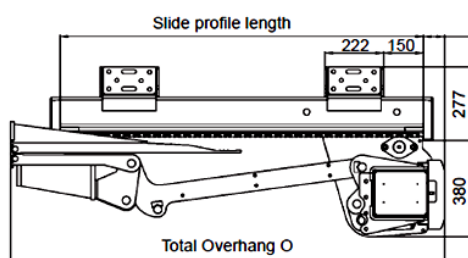

Installation dimensions (mm)


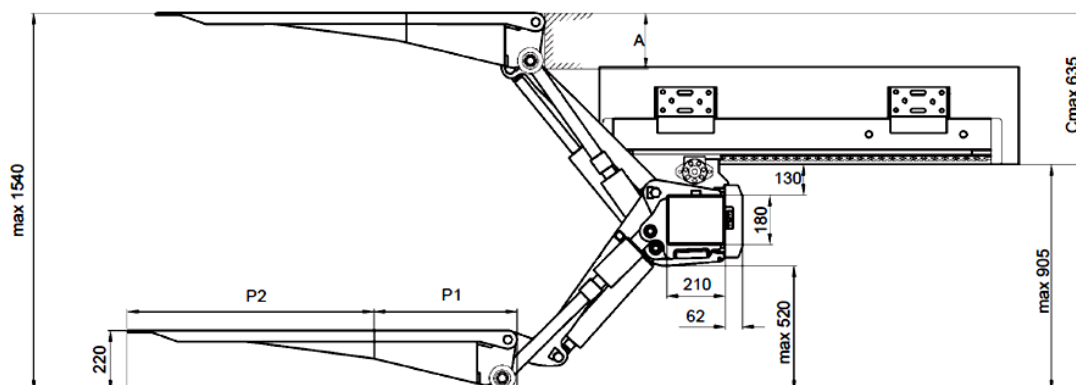


P1 (mm)	Sliderprofile length (mm)
- 700	1590
700 -	1700

1500 / 2000 kg

P1	P2	O
524	989	1704
524	1164	1704
674	989	1854

C	A
635	210
600	191
550	177
500	167
450	158
400	147
350	134
262	118

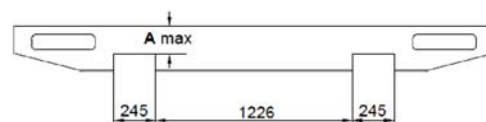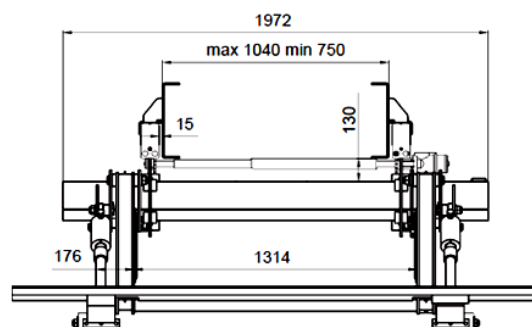

ZEPRO

ZEPRO Sales

Tel: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: zepro@zepro.com, Internet: www.zepro.com