

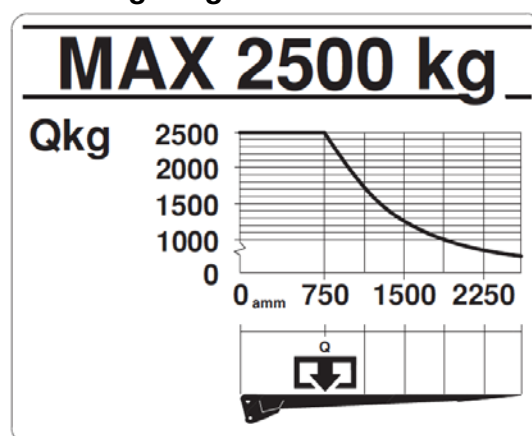
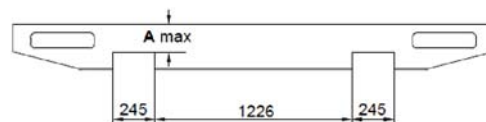
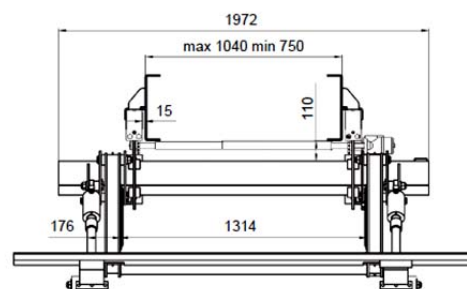


## Loading Diagram

| (200 bar)                      | 24 volt             |
|--------------------------------|---------------------|
| Pump - Motor Unit              | 160 A               |
| Magnet (hydraulic unit)        | 2,6 A               |
| Magnet (electric safety valve) | 0,75 A              |
| Solenoid                       | 1,8 A               |
| Cable area:                    |                     |
| Control cable                  | 1,5 mm <sup>2</sup> |
| Main cable 0-8 m               | 35 mm <sup>2</sup>  |
| Main cable 8-15 m              | 35 mm <sup>2</sup>  |
| Main cable >15 m               | 50 mm <sup>2</sup>  |
| Power source:                  |                     |
| Min. capacity                  | 180 Ah              |
| Min. voltage                   | 18 Volt             |

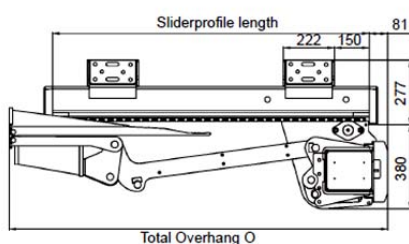

## Installation dimensions (mm)

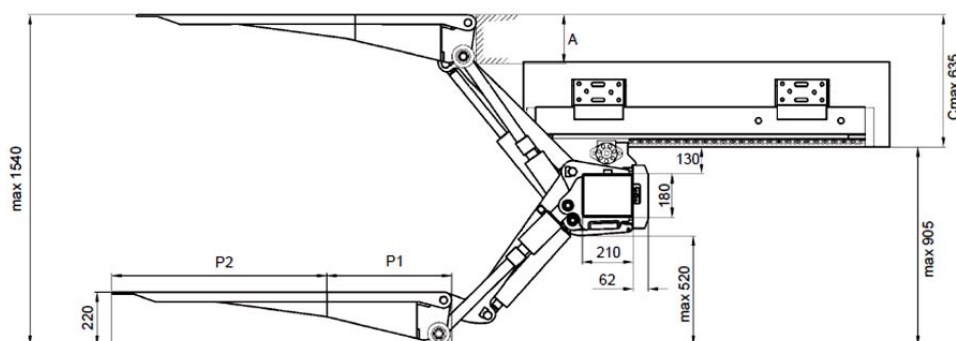

| P1 (mm) | Slider profile length (mm) |
|---------|----------------------------|
| - 700   | 1590                       |
| 700 -   | 1700                       |

2500 kg

| P1  | P2   | O    |
|-----|------|------|
| 675 | 1039 | 1855 |
| 750 | 1164 | 1930 |
| 875 | 1164 | 2055 |

(P1 in Steel)

| C   | A   |
|-----|-----|
| 635 | 210 |
| 600 | 191 |
| 550 | 177 |
| 500 | 167 |
| 450 | 158 |
| 400 | 147 |
| 350 | 134 |
| 262 | 118 |

# ZEPRO

ZEPRO Sales

Tel: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: [zepto@zepto.com](mailto:zepto@zepto.com), Internet: [www.zepto.com](http://www.zepto.com)