

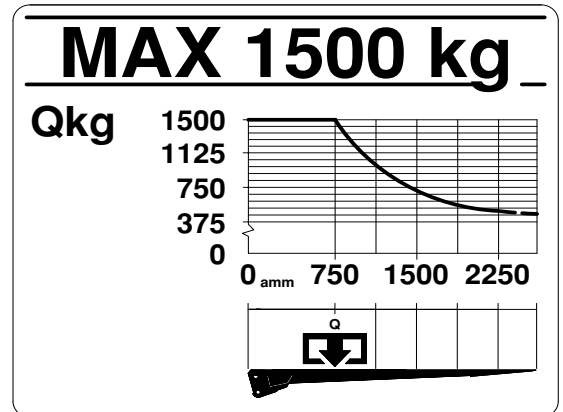
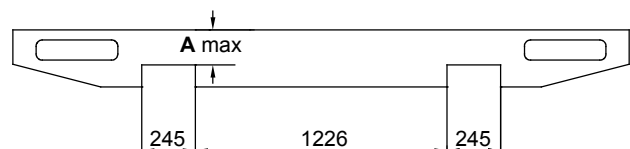
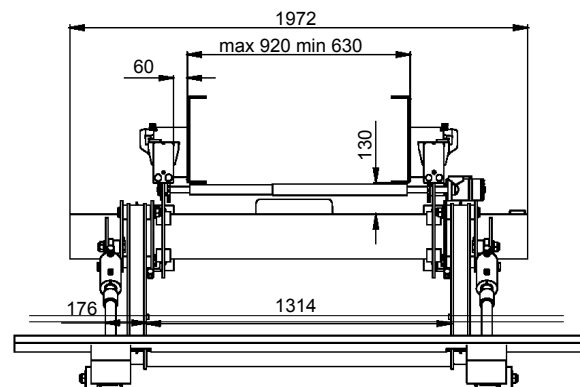


| (200 bar)                      | 12 volt             | 24 volt             |
|--------------------------------|---------------------|---------------------|
| Pump - Motor Unit              | 245 A               | 135 A               |
| Magnet (hydraulic unit)        | 4,2 A               | 2,1 A               |
| Magnet (electric safety valve) | 1,5 A               | 0,75 A              |
| Solenoid                       | 1,5 A               | 0,85 A              |
| Cable area:                    |                     |                     |
| Control cable                  | 1,5 mm <sup>2</sup> | 1,5 mm <sup>2</sup> |
| Main cable 0-8m                | 35 mm <sup>2</sup>  | 35 mm <sup>2</sup>  |
| Main cable 8-15m               | 50 mm <sup>2</sup>  | 35 mm <sup>2</sup>  |
| Main cable <15m                | -                   | 50 mm <sup>2</sup>  |
| Power source:                  |                     |                     |
| Min. capacity                  | 170 Ah              | 180 Ah              |
| Min. voltage                   | 9 Volt              | 18 Volt             |

Loading diagram

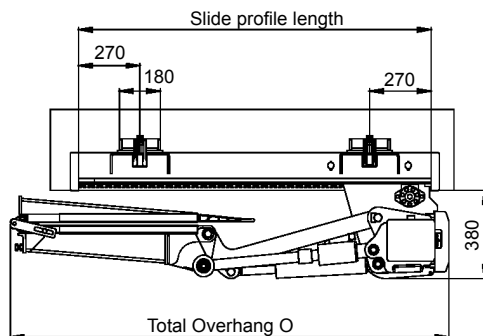

Installation dimensions (mm)

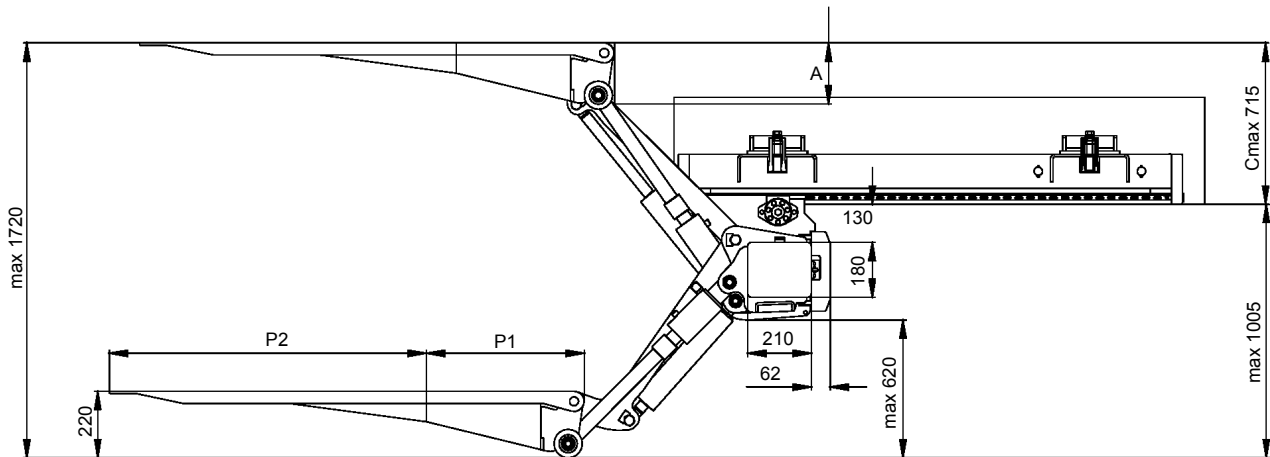

| P1 (mm) | Slide profile length (mm) |
|---------|---------------------------|
| - 700   | 1590                      |
| 700 -   | 1700                      |

PML

| P1  | P2   | O    |
|-----|------|------|
| 524 | 989  | 1824 |
| 524 | 1164 | 1824 |
| 674 | 989  | 1974 |

| C   | A   |
|-----|-----|
| 715 | 205 |
| 700 | 195 |
| 650 | 182 |
| 600 | 172 |
| 550 | 164 |
| 500 | 157 |
| 450 | 145 |
| 400 | 135 |
| 350 | 121 |
| 305 | 110 |