

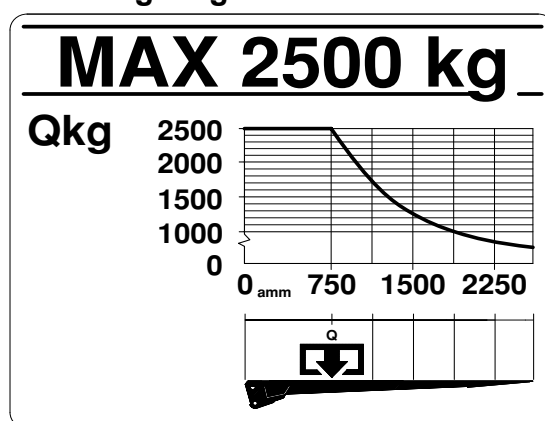
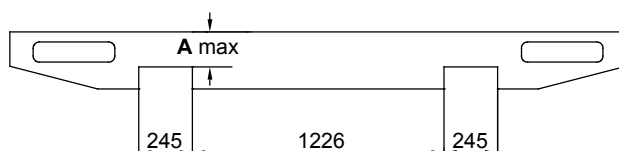
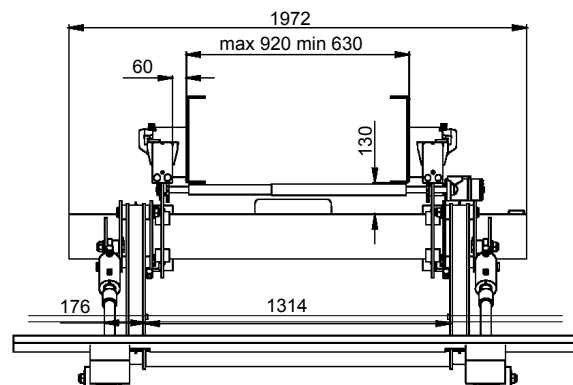


(200 bar)	12 volt	24 volt
Pump - Motor Unit	245 A	135 A
Magnet (hydraulic unit)	4,2 A	2,1 A
Magnet (electric safety valve)	1,5 A	0,75 A
Solenoid	1,5 A	0,85 A
Cable area:		
Control cable	1,5 mm ²	1,5 mm ²
Main cable 0-8m	35 mm ²	35 mm ²
Main cable 8-15m	50 mm ²	35 mm ²
Main cable <15m	-	50 mm ²
Power source:		
Min. capacity	170 Ah	180 Ah
Min. voltage	9 Volt	18 Volt

Loading diagram

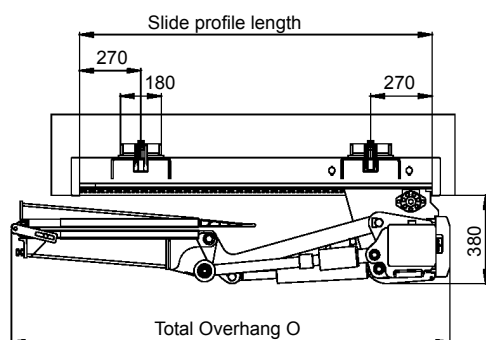

Installation dimensions (mm)

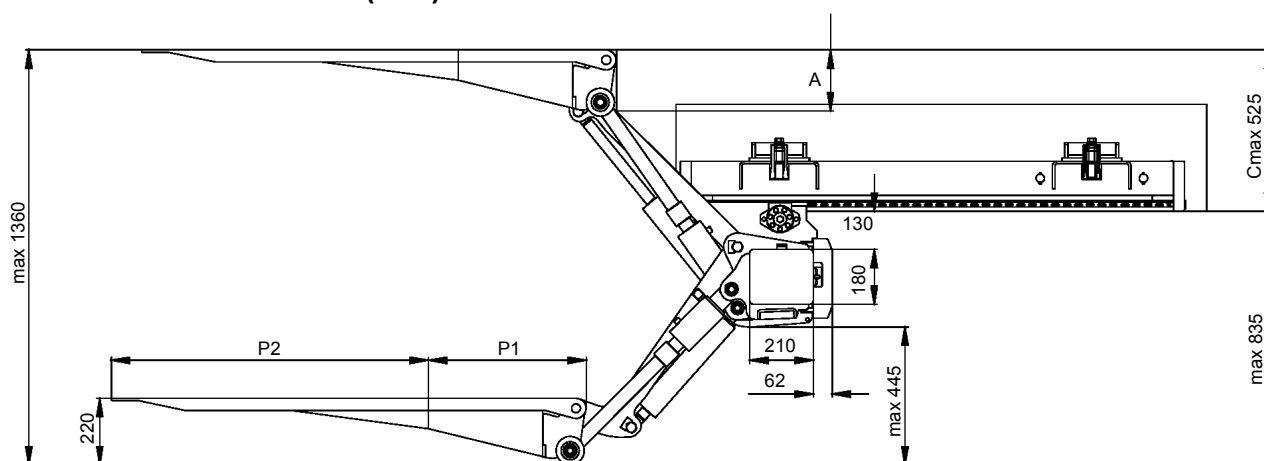

P1 (mm)	Slide profile length (mm)
- 600	1370
600 - 800	1590
800 -	1700

C	A
525	198
500	183
450	169
400	158
350	145
300	130
235	100

PML

P1	P2	O
674	1039	1734
749	1164	1809
874	1164	1934

P1 in steel



ZEPRO Sales

Tel: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: zepto@zeptro.com, Internet: www.zeptro.com