

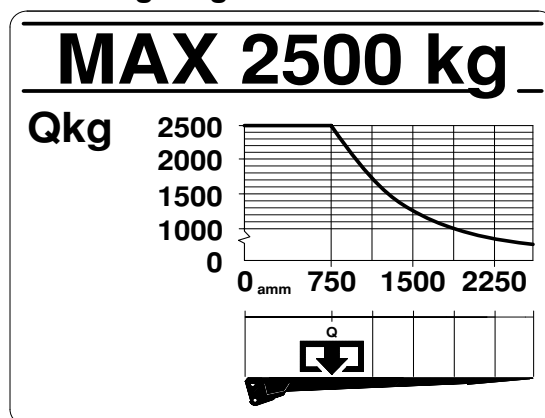
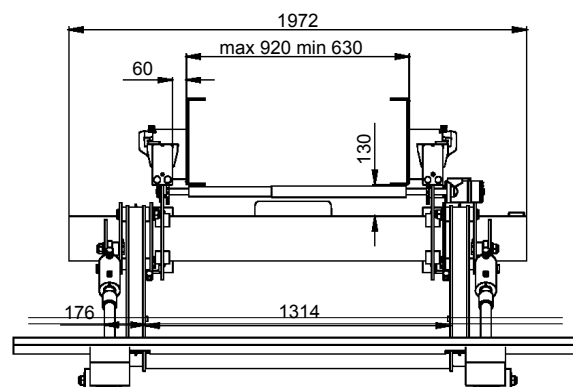


(200 bar)	12 volt	24 volt
Pump - Motor Unit	245 A	135 A
Magnet (hydraulic unit)	4,2 A	2,1 A
Magnet (electric safety valve)	1,5 A	0,75 A
Solenoid	1,5 A	0,85 A
Cable area:		
Control cable	1,5 mm ²	1,5 mm ²
Main cable 0-8m	35 mm ²	35 mm ²
Main cable 8-15m	50 mm ²	35 mm ²
Main cable <15m	-	50 mm ²
Power source:		
Min. capacity	170 Ah	180 Ah
Min. voltage	9 Volt	18 Volt

Loading diagram

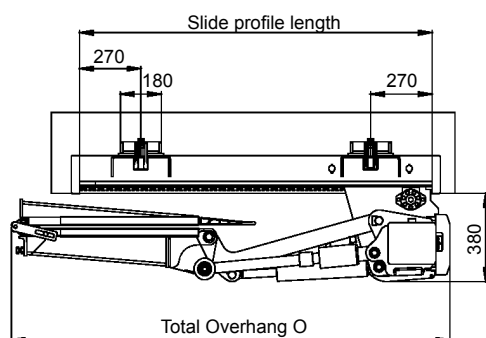

Installation dimensions (mm)

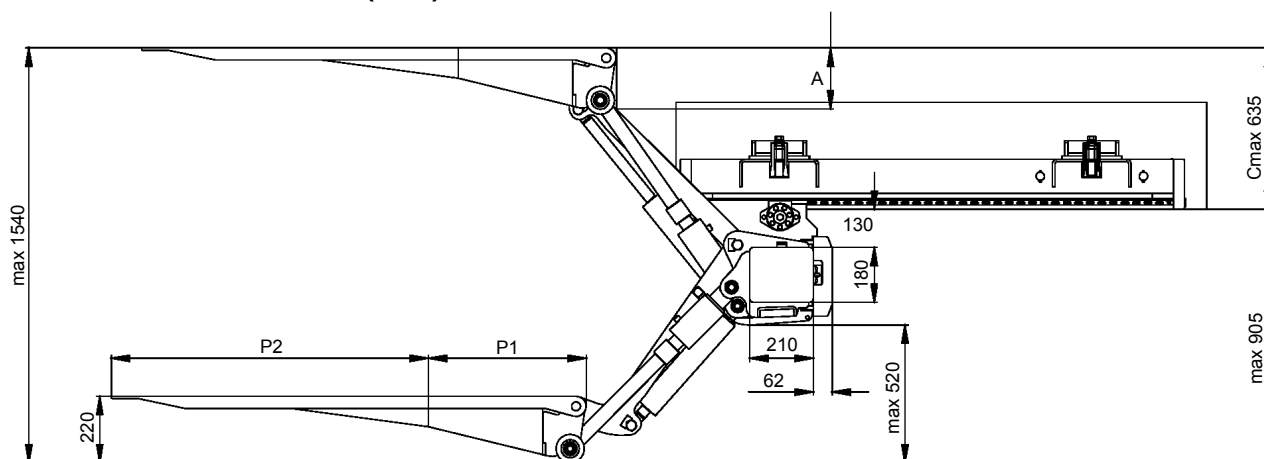


P1 (mm)	Slide profile length (mm)
- 700	1590
700 -	1700

PML

P1	P2	O
674	1039	1854
749	1164	1929
874	1164	2054

P1 in steel

C	A
635	210
600	191
550	177
500	167
450	158
400	147
350	134
262	118

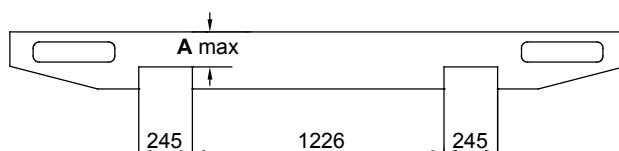

ZEPRO Sales

Tel: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: zepto@zepto.com, Internet: www.zepto.com