


JONSERED 1200RS




JONSERED 1200RS BASIC DATA

Technical data	J1200RS71	J1200RS89
Max. lifting capacity (kNm)	111	111
Hydraulic outreach* (m)	7.11	8.86
Hydraulic boom extension* (m)	1.58	3.15
Outreach - lifting capacity, standard (m - kg)	3.0 - 3370 4.0 - 2670 5.0 - 2230 6.0 - 1850 7.1 - 1490	4.0 - 2610 5.0 - 2180 6.0 - 1810 7.0 - 1540 8.0 - 1330 8.85 - 1060
Slewing system	Single	Single
Slewing angle (°)	415	415
Slewing torque, gross (kNm)	21.9	21.9
Max. slope viable at full capacity (°)	8	8
Max. working pressure (MPa)	26	26
Recommended oil flow – fixed pump (l/min max)	120	120
Recommended oil flow – variable displacement pump (l/min max)	160	160
Power needed at rec. oil flow (kW) - fixed pump	58	58
Power needed at rec. oil flow (kW) - variable displacement pump	77	77
Road width (mm)	2500	2500
Weight - "standard" crane with fixed stabilizer equipment (kg)	1980	2170


Load plate J1200RS89

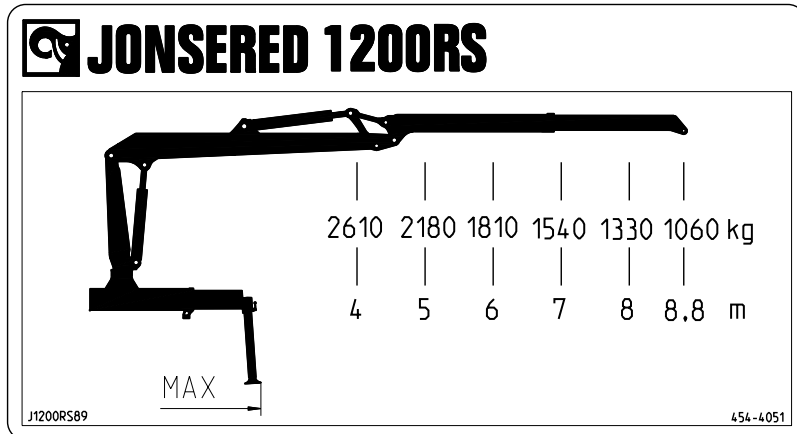


Side view J1200RS

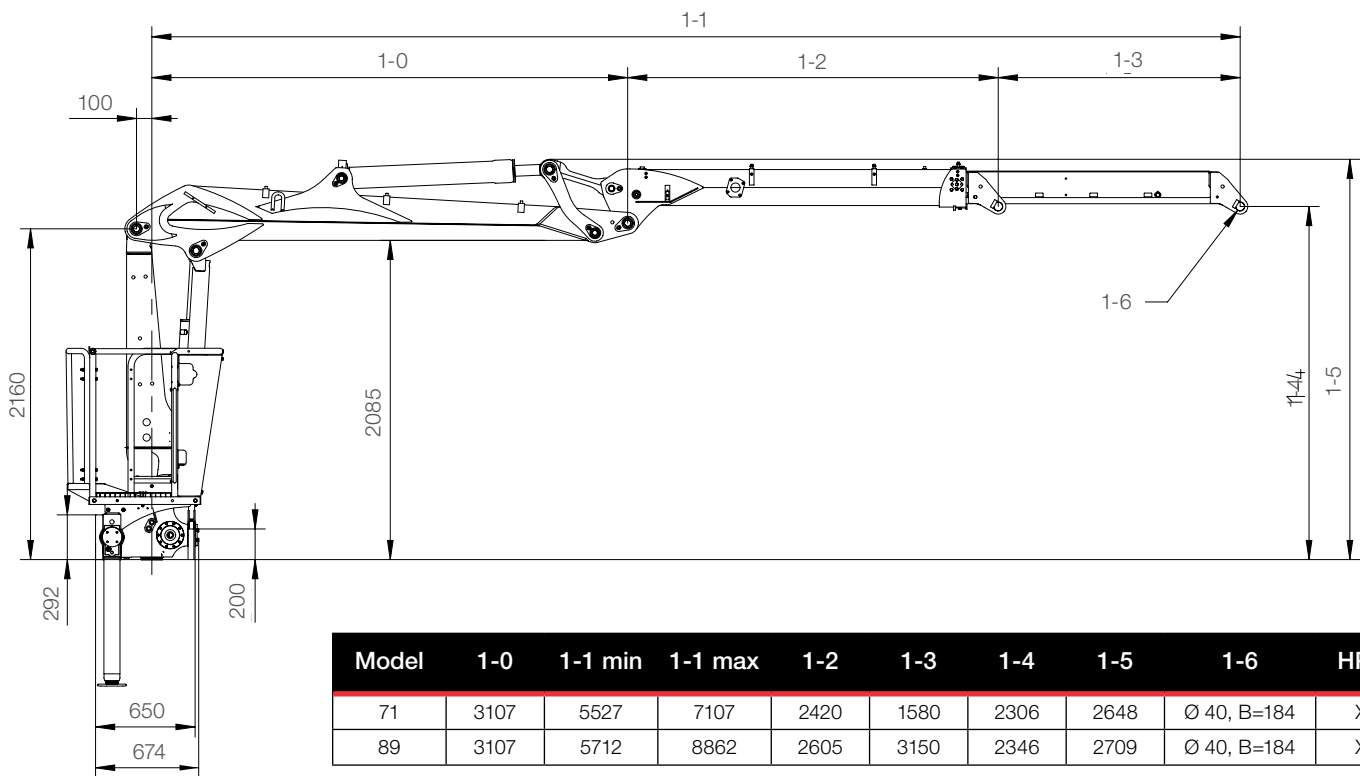

Close in

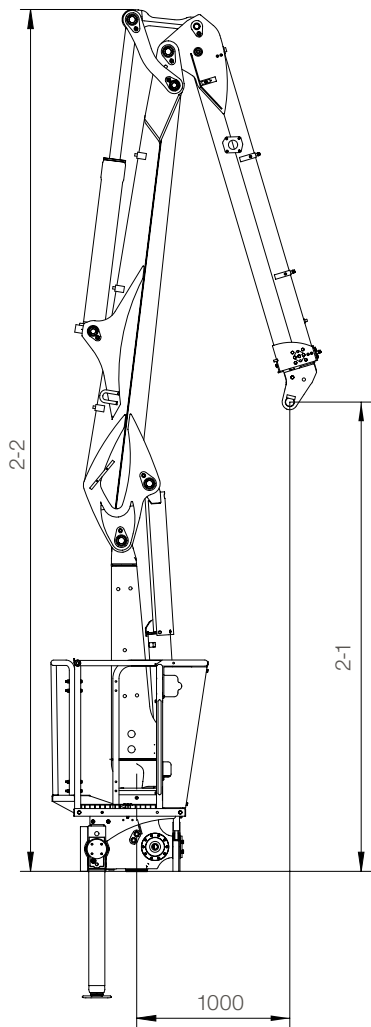


Parked


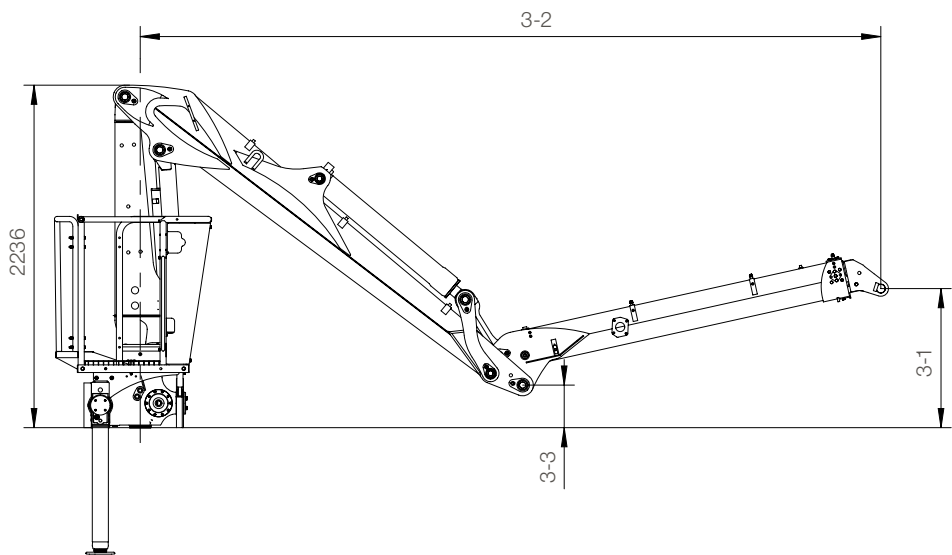


Model	2-1	2-2	3-1	3-2	3-3	HPL
71	3064	5628	908	4836	278	X
89	2867	5633	934	5023	278	X


First boom

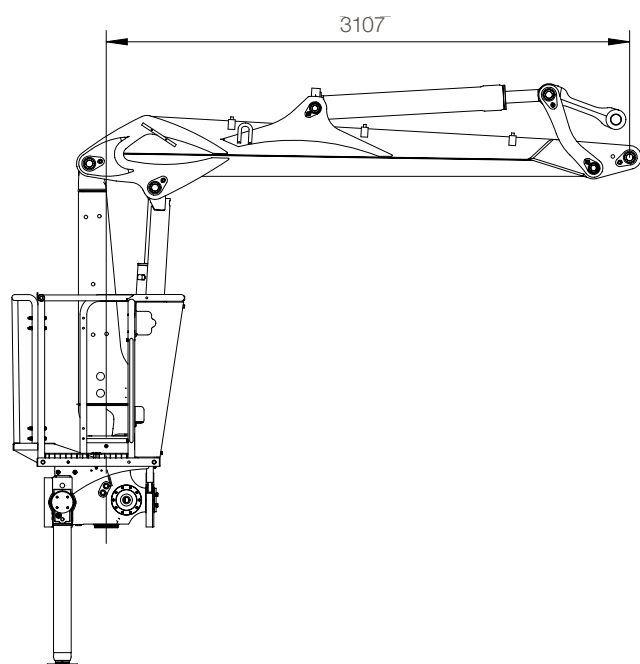

Second boom systems

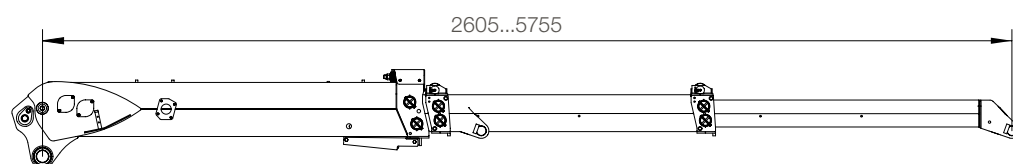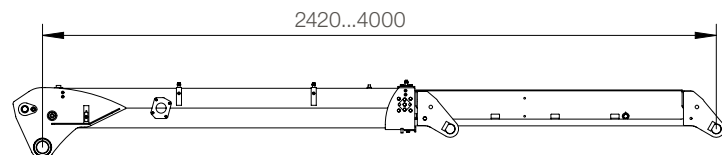


Stabilizers

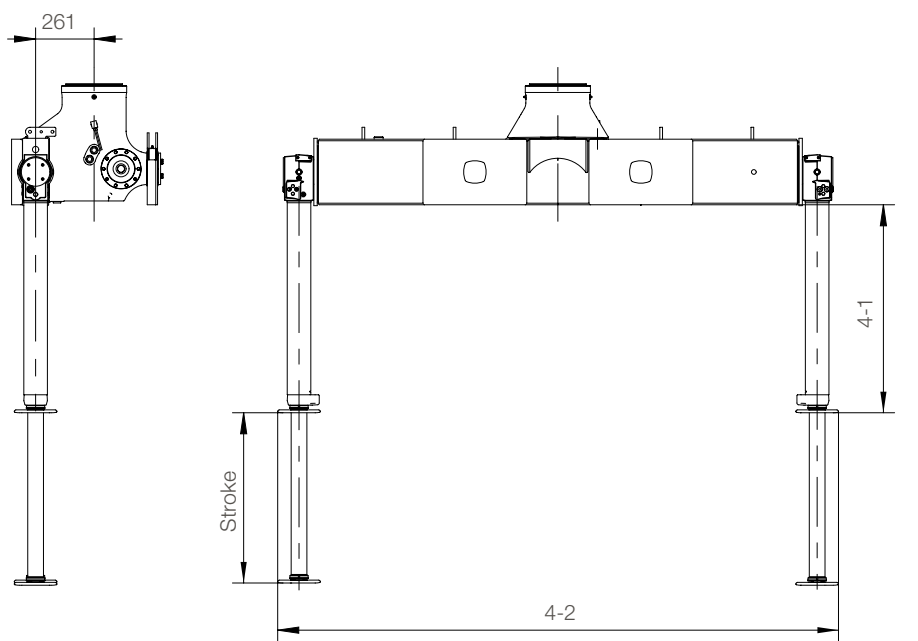


Model	Stroke	4-1	4-2
71	658	826	2497
89	758	926	2497


Base with stabilizers

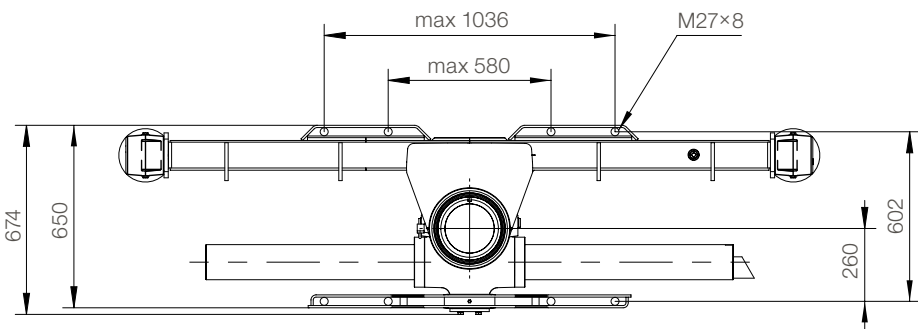


Ground control in mounting pos. A

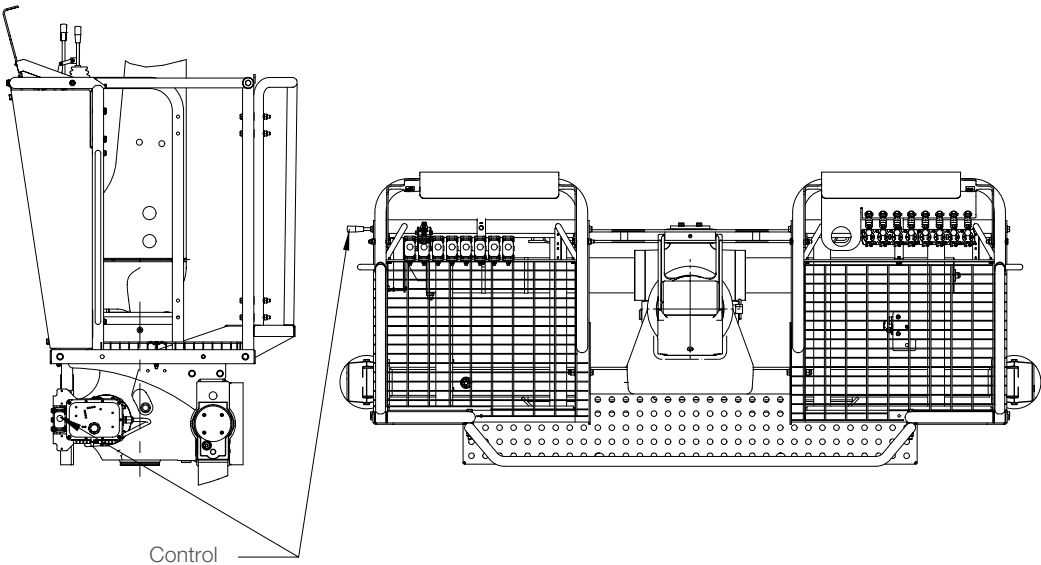


Platform in mounting pos. A

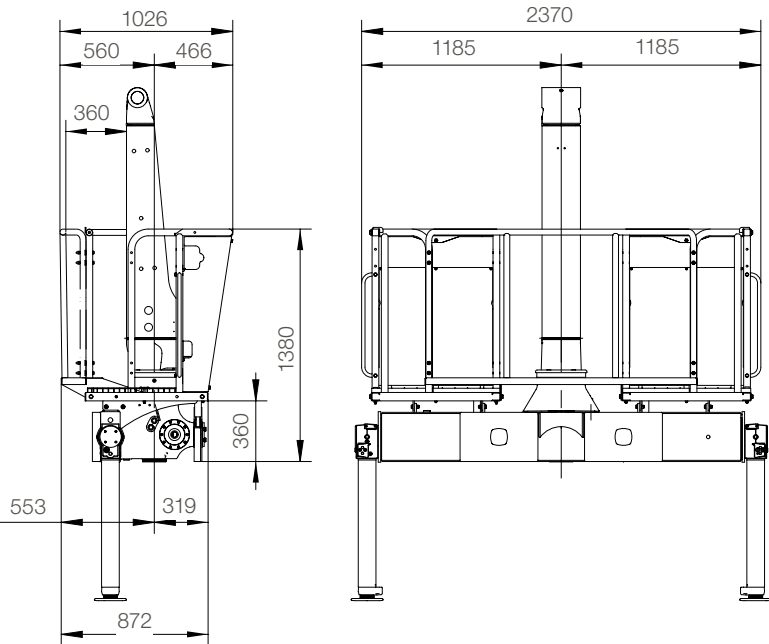


Mounting pos. A

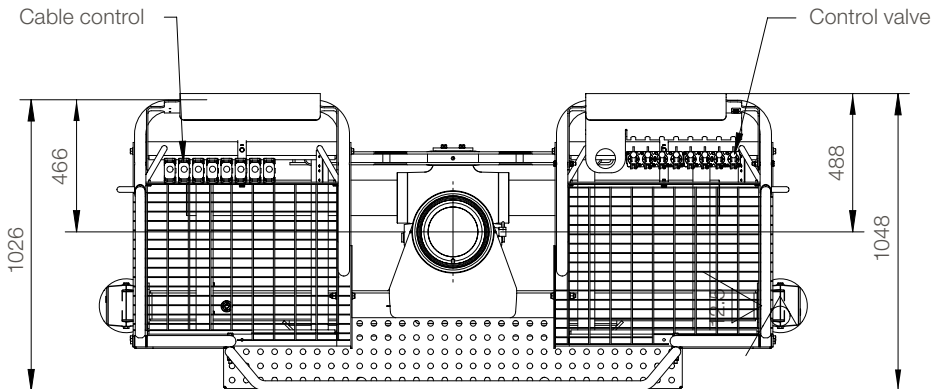


Ground control in mounting pos. R

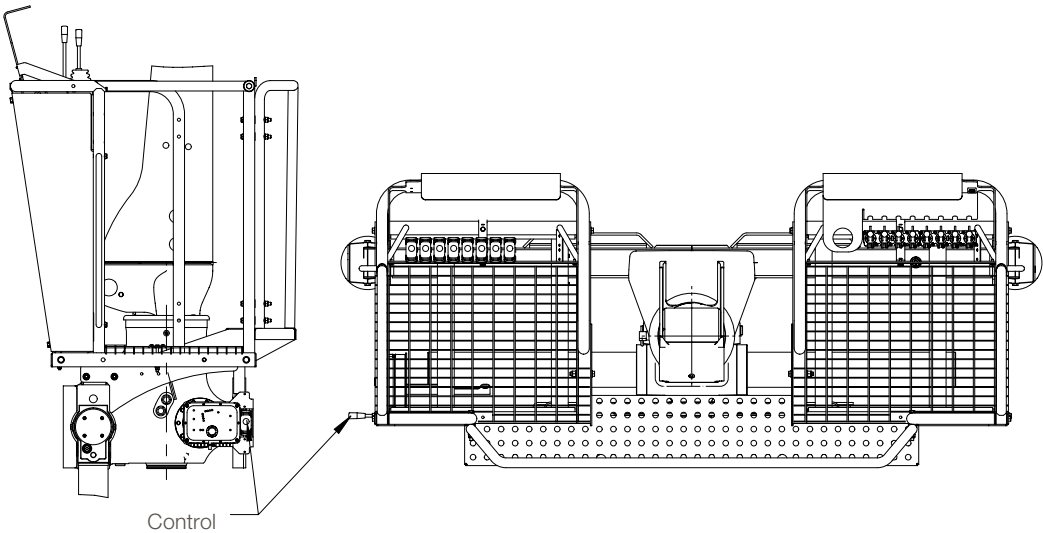

Platform in mounting pos. R

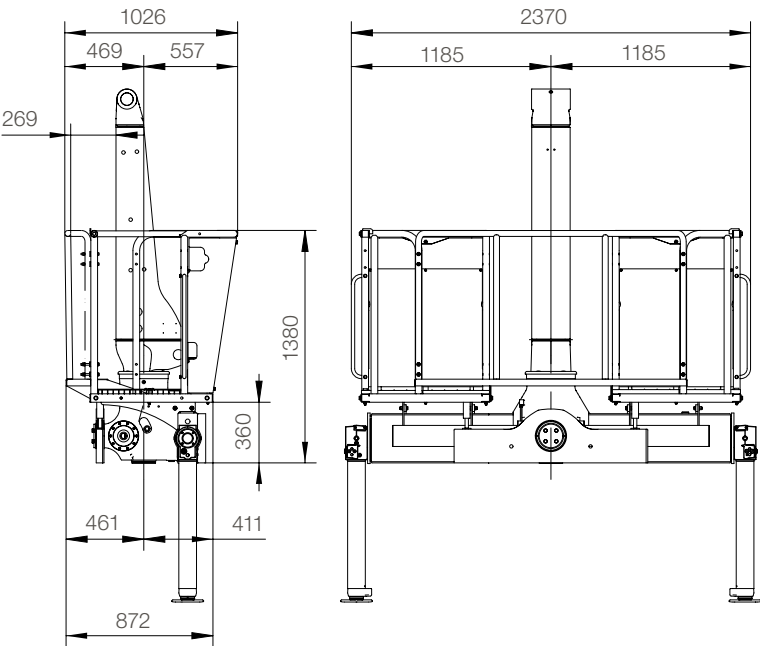

Mounting pos. R

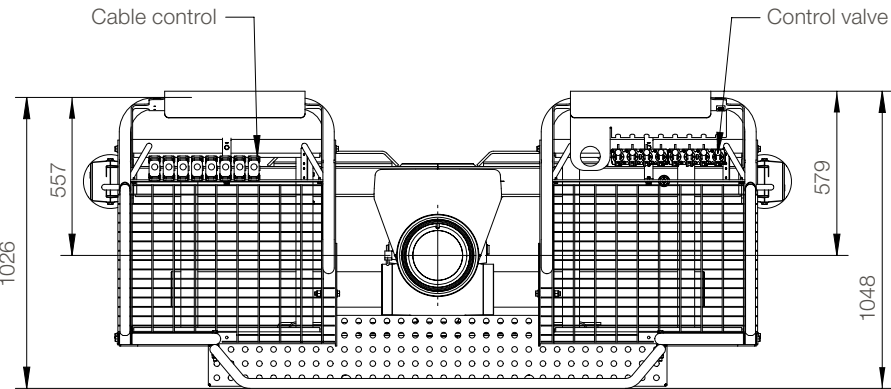

BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

© BD-J1200RS-EN-WW_160420

